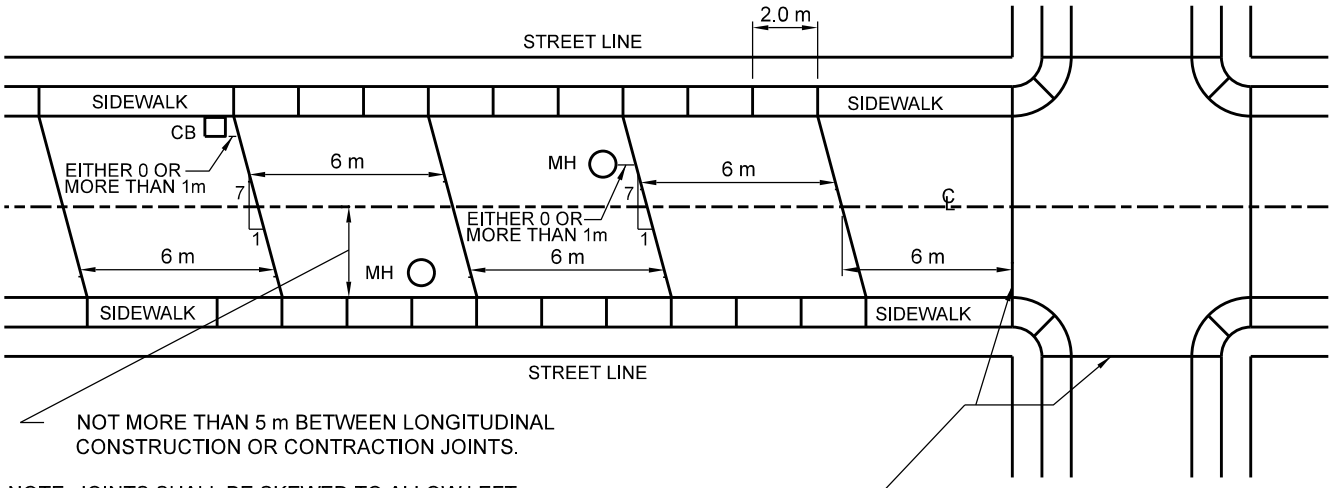

NOTE: JOINTS SHALL BE SKEWED TO ALLOW LEFT WHEEL OF VEHICLES TO STRIKE JOINT FIRST.

PLAN

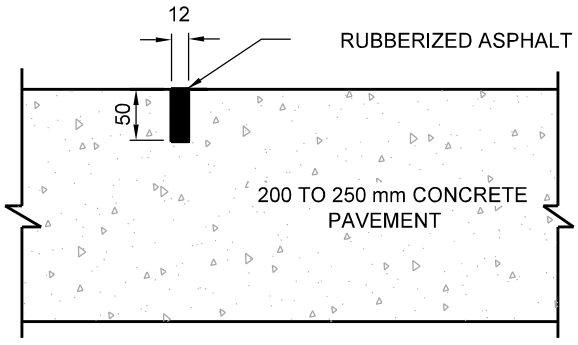

CONTRACTION JOINT

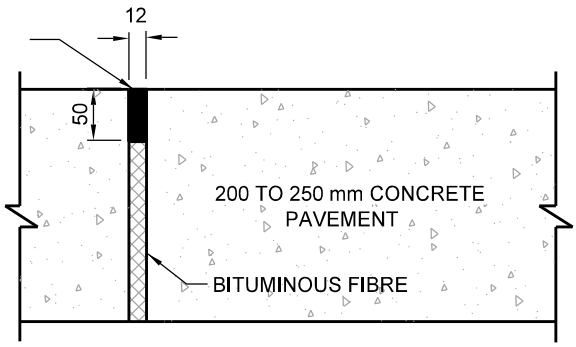

EXPANSION JOINT

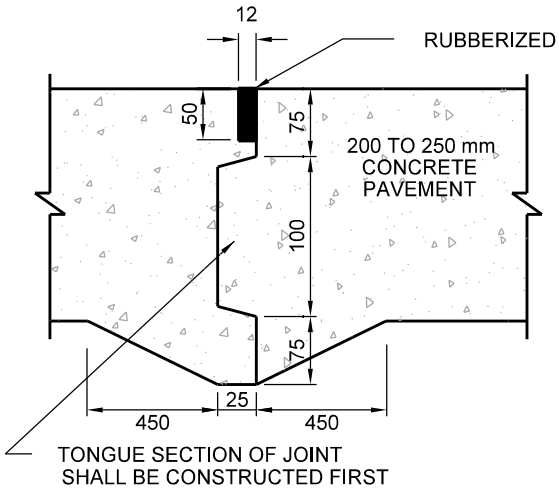

CONSTRUCTION JOINT

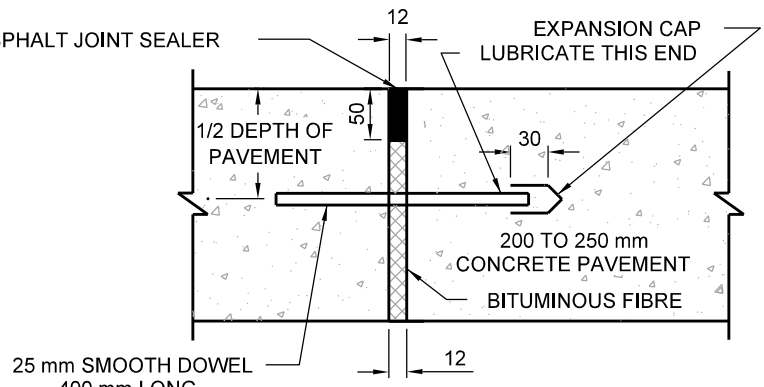

TRANSVERSE CONTRACTION JOINT FOR ARTERIAL ROADS OR AS SPECIFIED

NOTES:

1. PLACE STEEL MESH 100 x 100 @ 1.5 kg / m AROUND MAINTENANCE HOLES AND CATCHBASINS TO COVER AREA ENCLOSED BY 1.5 m FROM THE APPURTENANCE, AND BE CLEAR OF JOINTS BY 150 mm.
2. RECONSTRUCTION SHOULD BE CARRIED FURTHER TO THE NEXT JOINT.

All dimensions are in millimetres unless otherwise shown.

TORONTO	ENGINEERING & CONSTRUCTION SERVICES STANDARD DRAWING	REV 1	NOV 2014
	LOCATION AND DETAIL OF JOINTS FOR RIGID PAVEMENTS	**T-216.02-3**	
		NTS	SHEET 1