


Class of pole	Approximate breaking strength N	Pole		Minimum dia. 2.0 m above butt	Minimum augering dia.	Minimum pole top dia.
		length	setting depth			
		A' m	B' m	C' mm	D' mm	E' mm
1	20200	7.6	1.50	310	610	215
		9.1	1.65	330	685	
		10.6	1.80	350	685	
		12.2	1.95	370	685	
		13.7	2.10	390	760	
		15.2	2.25	410	760	
		16.7	2.40	430	760	
18.3	2.55	440	760			
2	16600	7.6	1.50	290	610	200
		9.1	1.65	310	610	
		10.6	1.80	330	685	
		12.2	1.95	350	685	
		13.7	2.10	370	685	
		15.2	2.25	390	710	
		16.7	2.40	400	710	
18.3	2.55	420	710			
3	13500	7.6	1.50	265	610	185
		9.1	1.65	290	610	
		10.6	1.80	310	610	
		12.2	1.95	330	685	
		13.7	2.10	350	685	
		15.2	2.25	370	685	
		16.7	2.40	390	710	
18.3	2.55	400	710			
4	10700	7.6	1.50	245	560	170
		9.1	1.65	265	610	
		10.6	1.80	290	610	
		12.2	1.95	310	610	
		13.7	2.10	330	685	
		15.2	2.25	340	685	
		16.7	2.40	350	685	
18.3	2.55	360	685			
5	8500	7.6	1.50	230	560	155
		9.1	1.65	245	560	
		10.6	1.80	265	610	
		12.2	1.95	290	610	
		13.7	2.10	310	610	
		15.2	2.25	330	685	
16.7	2.40	350	685			

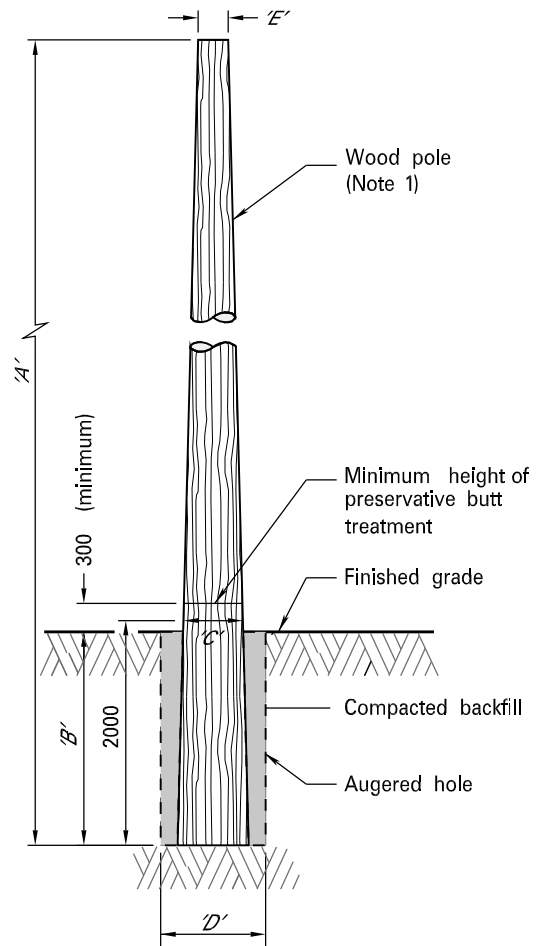

NOTES

1. Length and class of pole as specified in the contract.
2. Adjust burial depth according to soil conditions.
3. Pole to be CSA approved, type as indicated in the contract, complete with preservative butt treatment in accordance with CSA standards.
4. Dimensions are in millimetres or metres, unless otherwise shown.