


## MONOLITHIC CONCRETE CURB AND SIDEWALK

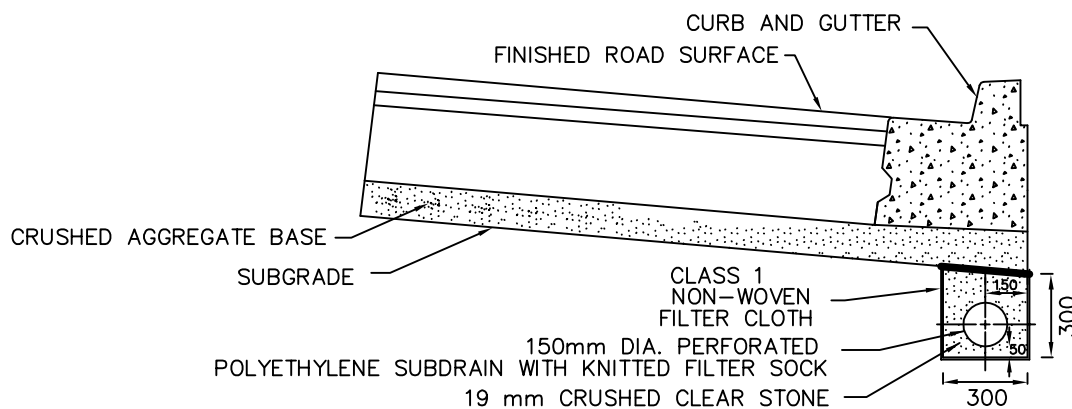

## CONCRETE CURB AND GUTTER

### NOTES:

1. FILTER CLOTH SHALL BE OVERLAPPED AT THE TOP AND INSTALLED AS PER TS 405.
2. IF THE EXISTING CONCRETE CURB AND GUTTER IS TO REMAIN IN PLACE, THE SUBDRAIN SHALL BE PLACED UNDER THE STONE BASE OF THE CURB AND THE SUBDRAIN SHALL BE PLACED AS CLOSE AS POSSIBLE TO THE CENTRE LINE OF THE CURB OR AS DIRECTED BY THE CITY.
3. LEDGE BEHIND CURB IS FOR ILLUSTRATION ONLY, REFER TO T-600.05-1 FOR DETAIL.

 METRIC  
 ALL DIMENSIONS SHOWN HERE ARE IN  
 MILLIMETRES UNLESS OTHERWISE NOTED



**TECHNICAL SERVICES**  
 Engineering Services - Works Facilities & Structures  
 CADD Services

|           |               |                          |                   |
|-----------|---------------|--------------------------|-------------------|
| SCALE:    | N.T.S.        | <b>ROADWAY SUBDRAINS</b> | DRAWING NUMBER:   |
| DATE:     | NOVEMBER 2009 |                          | <b>T-216.02-8</b> |
| DRAFTING: | V. DIDIANO    |                          | GENERAL           |