


FOR USE WITH RIGID PAVEMENT

2-15mm REINFORCING BARS FOR INDUSTRIAL DRIVEWAYS, TO BE EXTENDED 600mm BEYOND WIDTH OF DRIVEWAY ON EACH END.

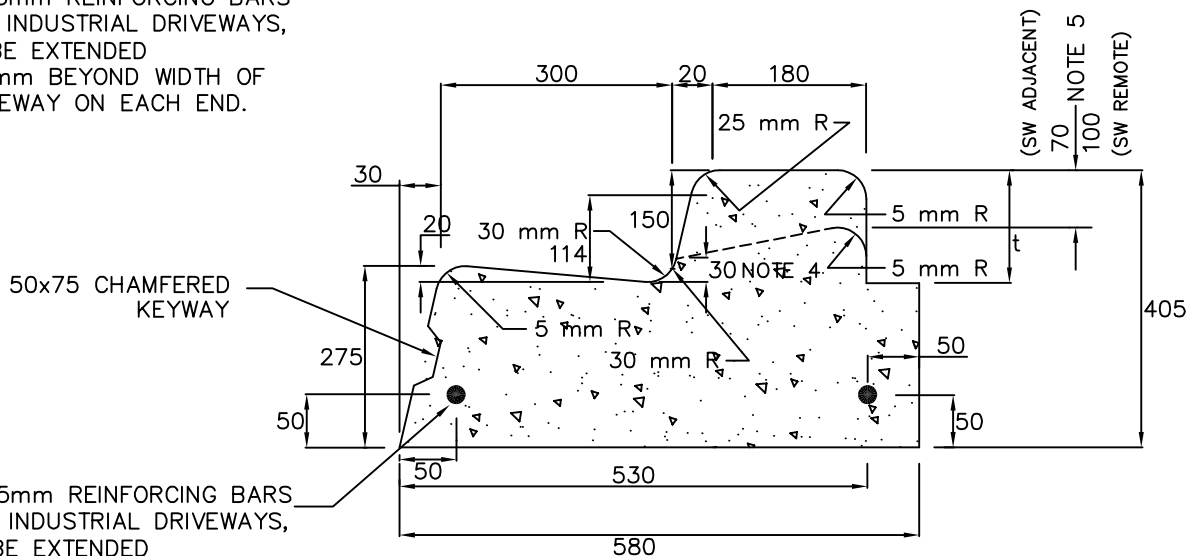

FOR USE WITH FLEXIBLE PAVEMENT

NOTES:

1. CONCRETE CURB MUST MATCH CONCRETE ROAD BASE
2. EXPANSION JOINTS SHALL BE SPACED 6 m APART TO COINCIDE WITH JOINTS IN ADJACENT SIDEWALK AND CONCRETE ROAD BASE.
3. t=THICKNESS OF ADJACENT SIDEWALK OR PAVER STRIP.
4. 10mm FOR SIDEWALK RAMPS AND DISABILITY ACCESSES.
5. ENTRANCE TERMINATION AS PER DWG. T-350.01

METRIC  
 ALL DIMENSIONS SHOWN HERE ARE IN MILLIMETRES UNLESS OTHERWISE NOTED



TECHNICAL SERVICES  
 Engineering Services - Works Facilities & Structures

SCALE:	N.T.S.	<b>CONCRETE CURB AND GUTTER</b>	DRAWING NUMBER:	T-600.05-1
DATE:	OCTOBER, 2006		SHEET:	1
DRAFTING:	V. DIDIANO			