

EXISTING OR NEW  
CONCRETE CURB

EXPANSION JOINT,  
6.0 m APART, TYP.


CONCRETE  
SIDEWALK  
COARSE TEXTURED  
BROOM FINISH,  
PERPENDICULAR  
TO CURB, TYP.

CONCRETE  
BOULEVARD EDGE  
COARSE TEXTURED  
BROOM FINISH,  
45 DEGREE ANGLE  
TO CURB, TYP.

CONTROL JOINT,  
2.0 m APART, TYP.

EXPANSION JOINT WHEN  
EXISTING SIDEWALK IS  
RETAINED OR MONOLITHIC  
SIDEWALK IS NOT FEASIBLE  
(SEE NOTE 1)

TROWELLED  
JOINTS, TYP.

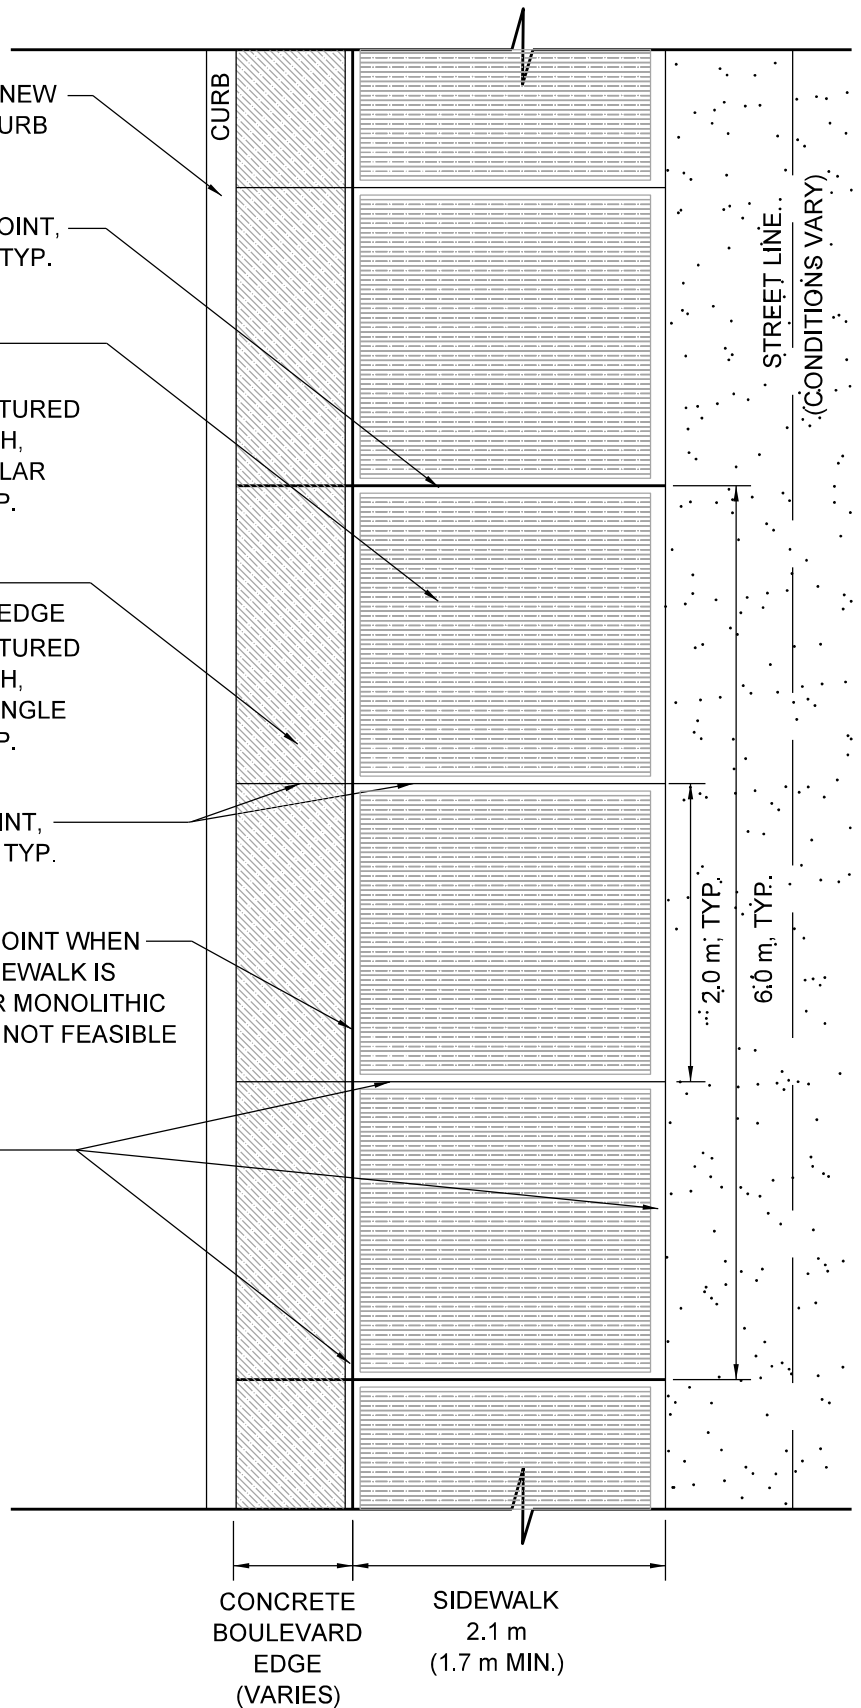

NOTE:

1. LONGITUDINAL EXPANSION JOINT IS REQUIRED BETWEEN THE SIDEWALK AND APRON WHEN THE DIFFERENCE BETWEEN THE SIDEWALK CROSSFALL AND THE APRON CROSSFALL IS 2% OR GREATER.
2. EXPANSION JOINT AND TROWELLED JOINT ACCORDING TO T-310.010-1.
3. CONCRETE BOULEVARD EDGE THICKNESS AND BEDDING ACCORDING TO T-310.010-2.

All dimensions are in millimetres unless otherwise shown.



ENGINEERING & CONSTRUCTION SERVICES STANDARD DRAWING

REV 0

APR 2015

CONCRETE BOULEVARD EDGE

T-310.010-9

NTS

SHEET 1