


SCHEME A

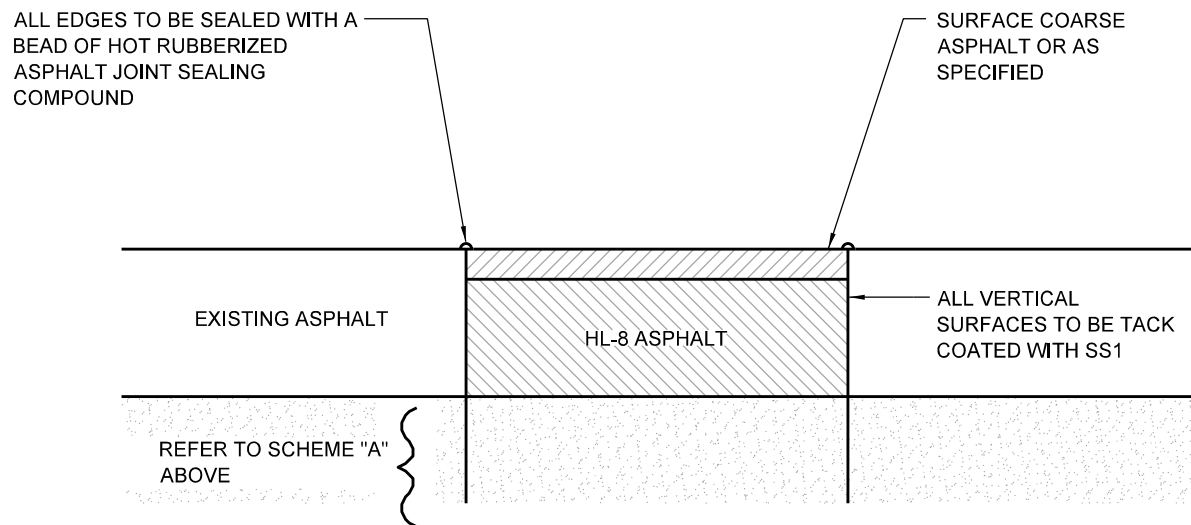

**SCHEME B
ALTERNATIVE ASPHALT PATCHING**

NOTE:

1. WHERE EXISTING HOT MIX ASPHALT DEPTH IS BETWEEN 80 AND 120 mm THE STEP JOINT SHALL BE 40 mm DEEP. A STEP JOINT IS NOT REQUIRED FOR PAVEMENT DEPTHS LESS THAN 80 mm.

All dimensions are in millimetres unless otherwise shown.



ENGINEERING & CONSTRUCTION SERVICES STANDARD DRAWING

REV 2

APR 2015

**FLEXIBLE PAVEMENT PATCHING
FOR UTILITY CUTS**

T-509.010-1

NTS

SH 2 of 2