




CONTRACTION JOINTS (OR
CONSTRUCTION JOINTS WHEN
APPLICABLE) TYPICAL

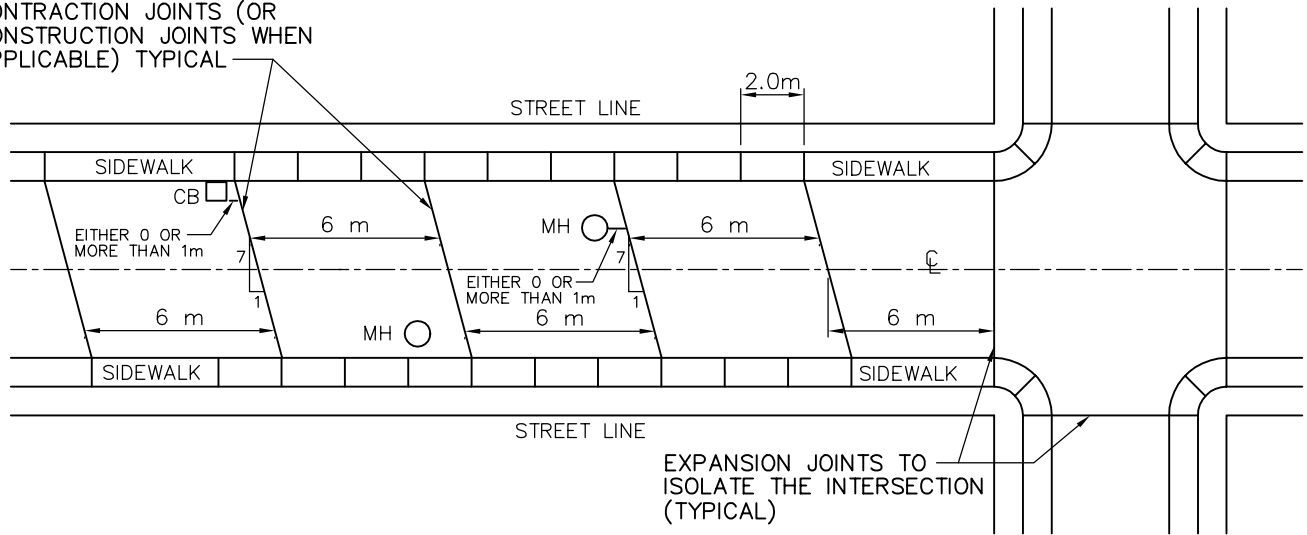

PLAN

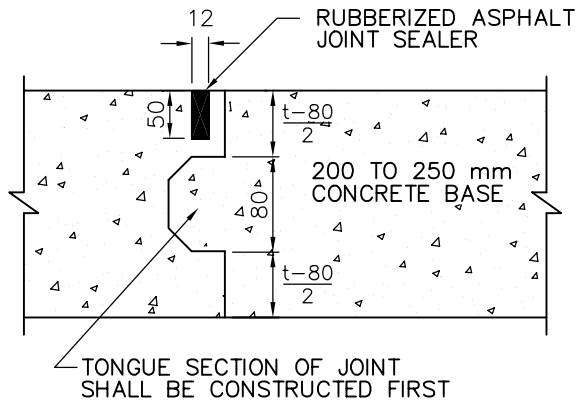


CONSTRUCTION JOINT

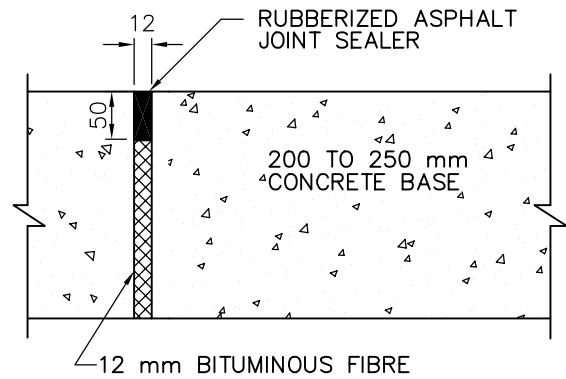

EXPANSION JOINT

NOTE:

1. t = THICKNESS OF CONCRETE BASE
2. JOINTS SHALL BE SKEWED TO ALLOW LEFT WHEEL OF VEHICLES TO STRIKE JOINT FIRST.
3. JOINTS IN THE SURFACE ASPHALT SHALL BE PLACED OVER THE JOINTS IN THE CONCRETE BASE.
4. RECONSTRUCTION SHOULD BE CARRIED FURTHER TO THE NEXT JOINT.

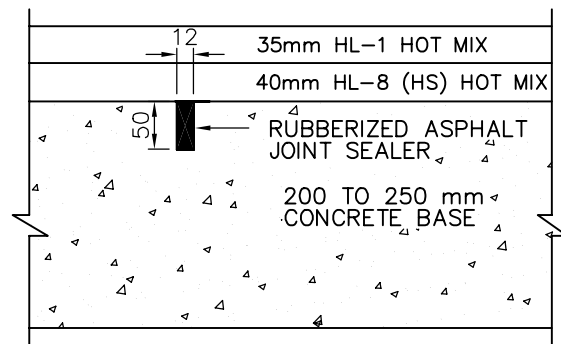

CONTRACTION JOINT

METRIC
ALL DIMENSIONS SHOWN HERE ARE IN
MILLIMETRES UNLESS OTHERWISE NOTED



WORKS & EMERGENCY SERVICES

TECHNICAL SERVICES DIVISION
Engineering Services - Works Facilities & Structures

LOCATION AND DETAIL OF JOINTS
FOR COMPOSITE PAVEMENTS

DRAWING NUMBER:
T-216.02-4

SCALE: N.T.S.
DATE: DECEMBER, 2003
DRAFTING: V. DIDIANO

SHEET: 1