


CONCRETE DRIVEWAY

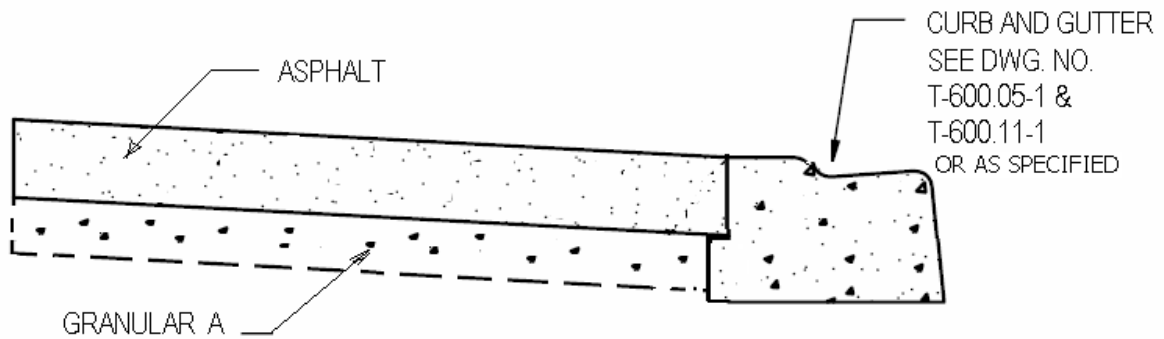

ASPHALT DRIVEWAY

TYPE OF DRIVEWAY		PAVEMENT STRUCTURE	THICKNESS
ASPHALT	RESIDENTIAL	HL3 F (FINE) TOP (2 LIFTS)	80
		HL8 BASE (SEE NOTE 2)	0
		GRANULAR A	150
	INDUSTRIAL / COMMERCIAL	HL3 F (FINE) TOP	50
		HL8 BASE (2 LIFTS)	75
		GRANULAR A	150
CONCRETE	RESIDENTIAL	32 MPa PCC TOP	150
		GRANULAR A	150
	INDUSTRIAL / COMMERCIAL	32 MPa PCC TOP	180
		GRANULAR A	150

NOTE:

1. KEY BEHIND CURB TO BE LOWERED TO ACCOMMODATE THE FULL DRIVEWAY THICKNESS
2. NEW ASPHALT DRIVEWAY TO BE PLACED IN 2 LIFTS WITH 40 mm HL3 F TOP AND 40 mm HL8 BASE, OR AS SPECIFIED

All dimensions are in millimetres unless otherwise shown.



CITY OF TORONTO STANDARD DRAWING

REV 01

NOV2010

DRIVEWAY THICKNESS

T-310.050-8

NTS

SHEET 1