
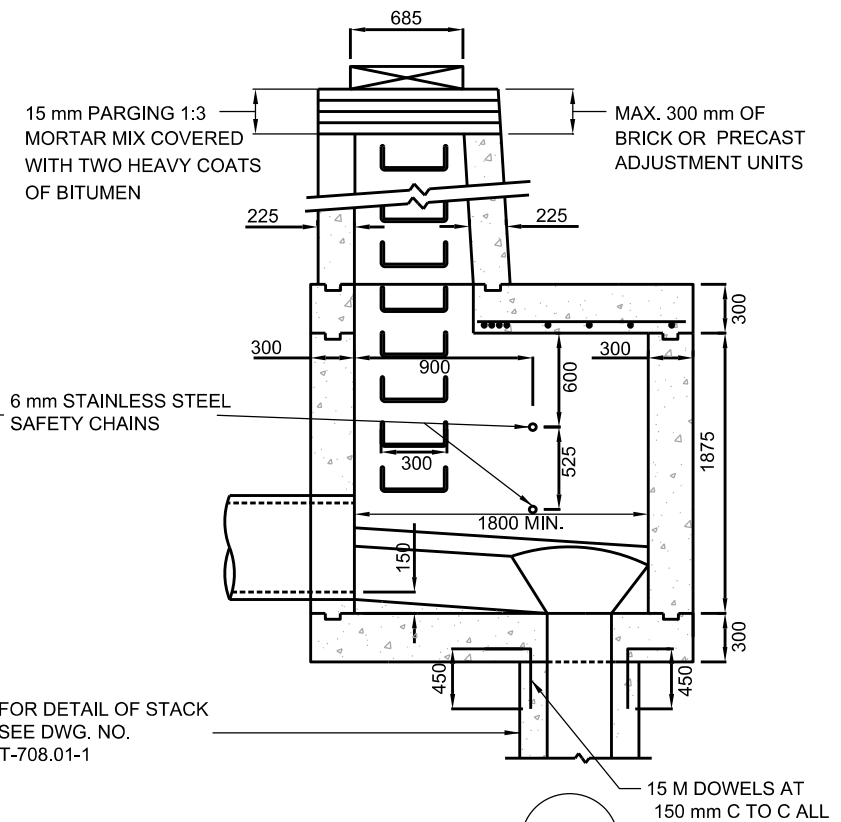


PLAN OF REINFORCED CONCRETE SLAB

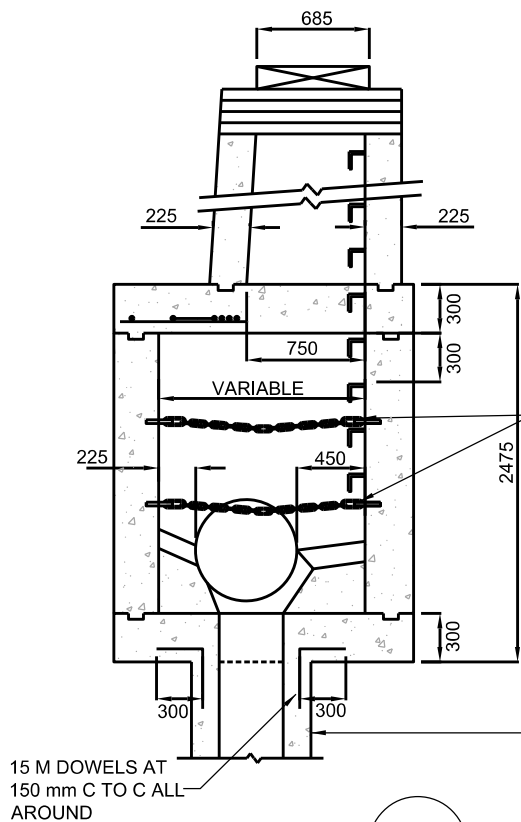

NOTES:

1. CONCRETE AT 28 DAYS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 32 MPa.
2. CARBON STEEL BARS FOR CONCRETE REINFORCEMENT AS PER CSA G30.18-09.
3. CONCRETE COVER ON REINFORCING STEEL IN ROOF SLAB SHALL BE 50 mm.
4. FIRST STEP TO BE 75 mm TO 300 mm BELOW FRAME. LAST STEP TO BE 300 mm ABOVE BENCHING OR 600 mm ABOVE INVERT IF NO BENCHING.

All dimensions are in millimetres unless otherwise shown.



ENGINEERING & CONSTRUCTION SERVICES STANDARD DRAWING

**CONCRETE MAINTENANCE HOLE
OVER STACK**

REV 2

NOV 2016

T-701.015-1

NTS

SHEET 1