


NOTES :

1. WHENEVER POSSIBLE SIGNS MAY BE PLACED BACK TO BACK ON NARROW TWO WAY STREETS.
2. SPEED HUMPS SHOULD BE AT LEAST 15 m FROM AN UNCONTROLLED INTERSECTION AND AT LEAST 60 m FROM A CONTROLLED INTERSECTION.
3. BUMP SIGN, WA - 22
4. NO MORE THAN 4 ARROWS SHALL BE INSTALLED ON A TYPICAL TWO-WAY ROAD UP TO 8.5 m WIDE. MAINTAIN CENTERLINE SPACING, AND EQUALIZE THE DISTANCE BETWEEN THE REMAINING ARROWS.

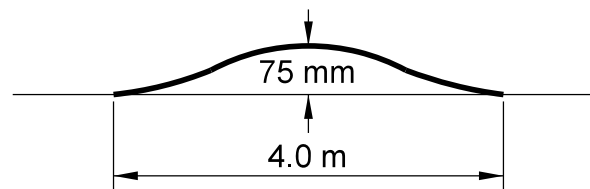

SECTION A - A
SINUSOIDAL SPEED HUMP

USED TO ACHIEVE A DESIRED SPEED OF 30 km/h

All dimensions are in millimetres unless otherwise shown.