


## ASPHALT DRIVEWAY

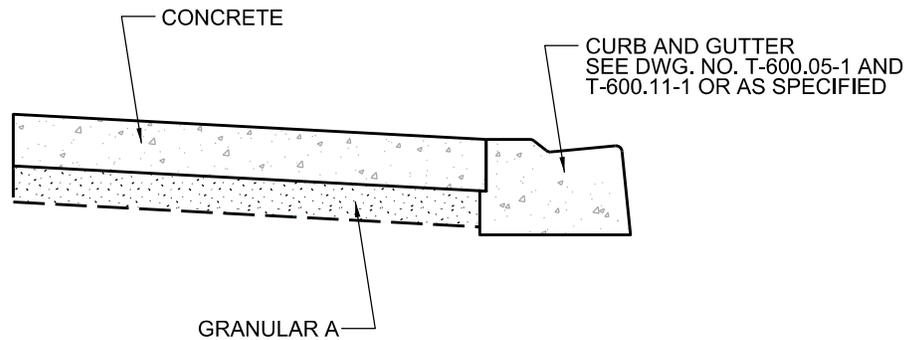

## CONCRETE DRIVEWAY

TYPE OF DRIVEWAY		PAVEMENT STRUCTURE	THICKNESS (mm)
ASPHALT	RESIDENTIAL	HL-3 F (FINE) TOP (2 LIFTS)	80
		HL-8 BASE (SEE NOTE 2)	0
		GRANULAR A	150
	INDUSTRIAL, CONDOMINIUM HIGH RISE, COMMERCIAL	HL-3 F (FINE) TOP	50
		HL-8 BASE (2 LIFTS)	80
		GRANULAR A	150
CONCRETE	RESIDENTIAL	PORTLAND CEMENT CONCRETE (PCC) TOP	150
		GRANULAR A	150
	INDUSTRIAL CONDOMINIUM HIGH RISE, COMMERCIAL	PORTLAND CEMENT CONCRETE (PCC) TOP	180
		GRANULAR A	150

### NOTES:

1. KEY BEHIND CURB TO BE LOWERED TO ACCOMMODATE THE FULL DRIVEWAY THICKNESS.
2. NEW ASPHALT DRIVEWAY TO BE PLACED IN 2 LIFTS WITH 40 mm HL-3 TOP AND 40 mm HL-8 BASE, OR AS SPECIFIED.

All dimensions are in millimetres unless otherwise shown.



ENGINEERING & CONSTRUCTION SERVICES STANDARD DRAWING

REV 2

NOV 2014

**DRIVEWAY THICKNESS**

**T-310.050-8**

NTS

SHEET 1