



**PLAN**

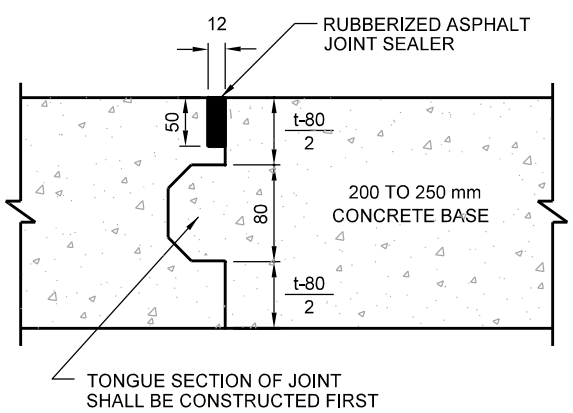

**CONSTRUCTION JOINT**

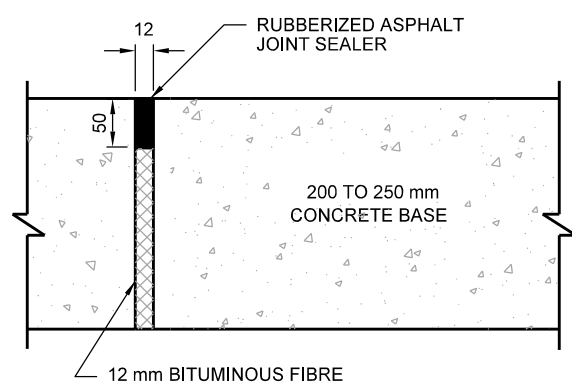


**EXPANSION JOINT**

NO FURTHER COMMENTS

NOTES:

1. t = THICKNESS OF CONCRETE BASE
2. JOINTS SHALL BE SKEWED TO ALLOW LEFT WHEEL OF VEHICLES TO STRIKE JOINT FIRST.
3. JOINTS IN THE SURFACE ASPHALT SHALL BE PLACED OVER THE JOINTS IN THE CONCRETE BASE.
4. RECONSTRUCTION SHOULD BE CARRIED FURTHER TO THE NEXT JOINT.

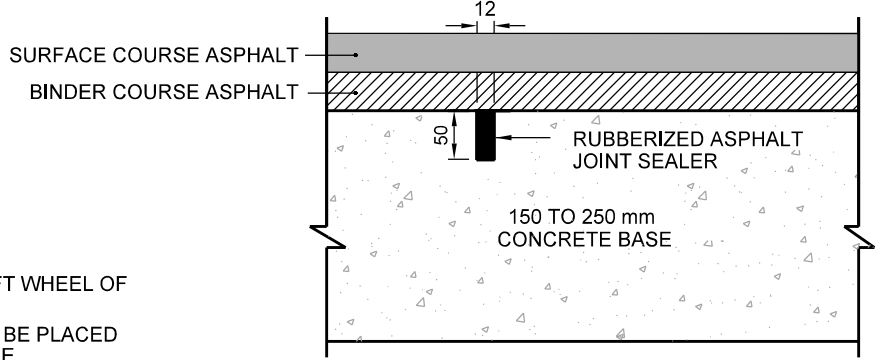

**CONTRACTION JOINT**

All dimensions are in millimetres unless otherwise shown.

	ENGINEERING & CONSTRUCTION SERVICES STANDARD DRAWING		REV 2	SEP 2018	
	<b>LOCATION AND DETAIL OF JOINTS FOR COMPOSITE PAVEMENTS</b>			<b>T-216.02-4</b>	
				NTS	SHEET 1