



BRICK MAINTENANCE HOLE

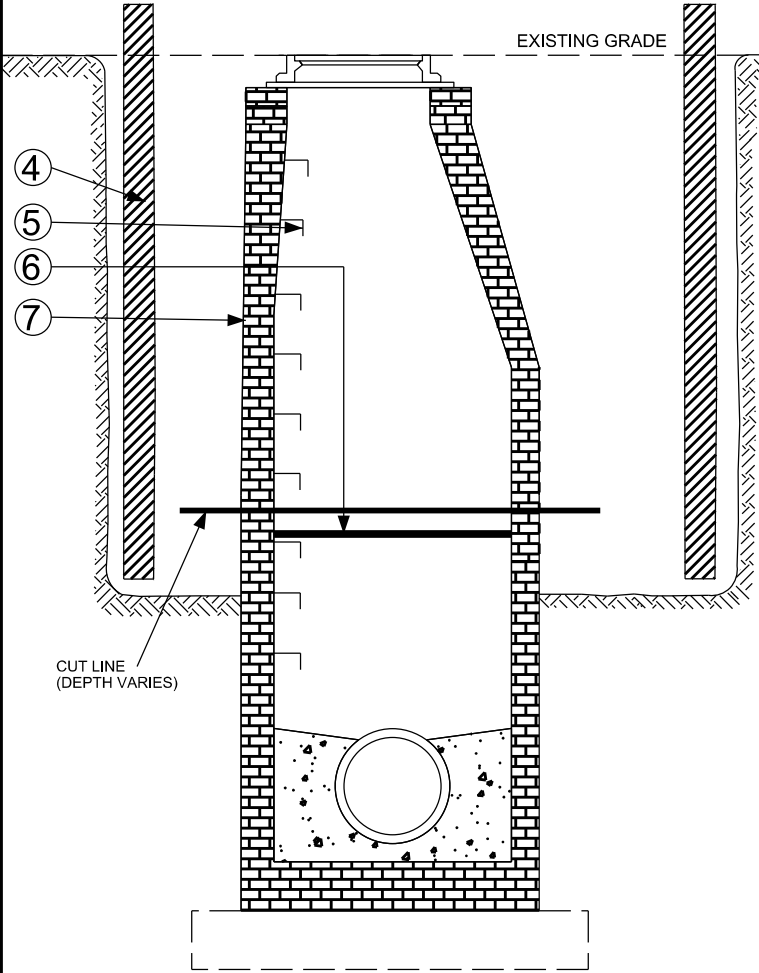

BRICK AND CONCRETE MAINTENANCE HOLE

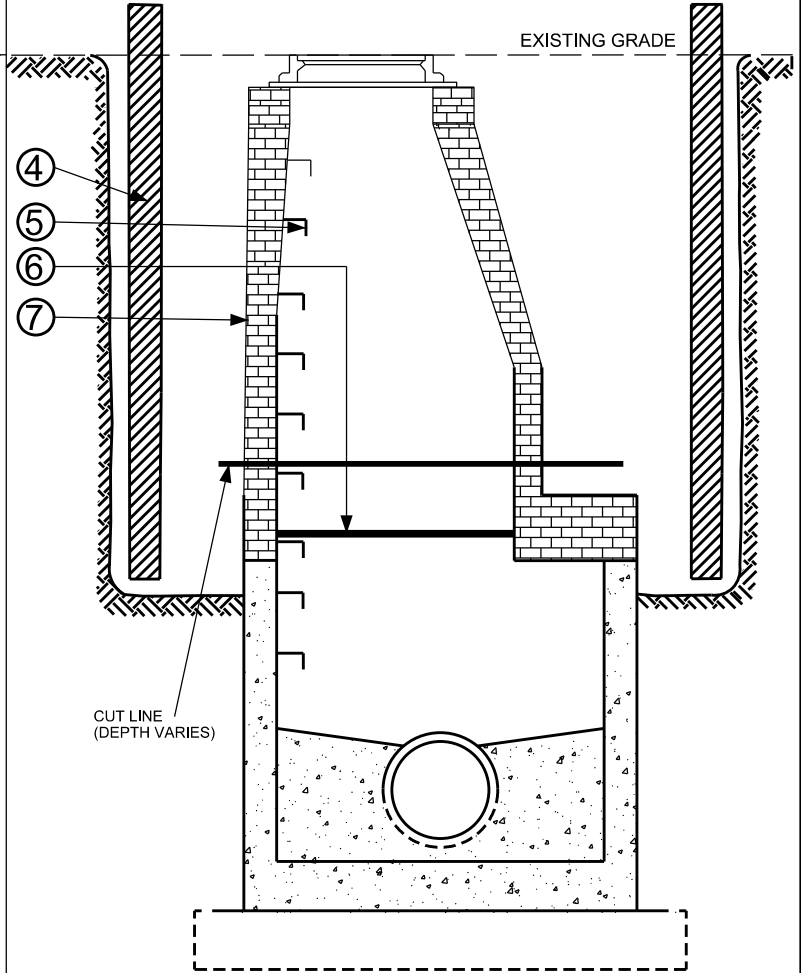

NOTES:

1. IF REQUIRED, CONSTRUCTION ACCESS PATH AS PER CONTRACT DRAWINGS AND PERMIT APPROVALS.
2. COMPLETE GEO-TECHNICAL AND HYDRO-GEOLOGICAL ASSESSMENTS FOR STRUCTURAL CAPACITY.
3. COMPLETE STRUCTURAL ASSESSMENT OF MAINTENANCE HOLE STRUCTURE.
4. INSTALL SHORING AND EXCAVATE SOIL TO EXPOSE THE STRUCTURE BELOW THE CUT LINE INDICATED IN THE TENDER DOCUMENT. SHORING SHALL BE AS SPECIFIED IN THE CONTRACT. CONTRACTOR TO REVIEW THE GEOTECHNICAL REPORT PRIOR TO DESIGNING THE SHORING SYSTEM.
5. REMOVE EXISTING LADDER RUNGS WHERE SPECIFIED.
6. INSTALL PROTECTIVE BARRIER WITH SUPPORT IN MAINTENANCE HOLE TO PREVENT CONSTRUCTION MATERIAL FROM ENTERING THE SEWER THROUGH THE MAINTENANCE HOLE.
7. REMOVE FRAME AND COVER AND CHIMNEY SECTION (TAPERED CAP) AT THE CUT LINE INDICATED IN TENDER DOCUMENT.
8. REFER TO DRAWING T-1120.04-5 FOR CHIMNEY REPLACEMENT DETAILS.
9. ALL DIMENSIONS ARE NOMINAL.

All dimensions are in millimetres unless otherwise shown.



ENGINEERING & CONSTRUCTION SERVICES STANDARD DRAWING

**DEMOLITION AND REMOVAL
OF BRICK OR BRICK AND CONCRETE
MAINTENANCE HOLE CHIMNEY**

REV 0 SEP 2019

T-1120.04-2

NTS SHEET 1