
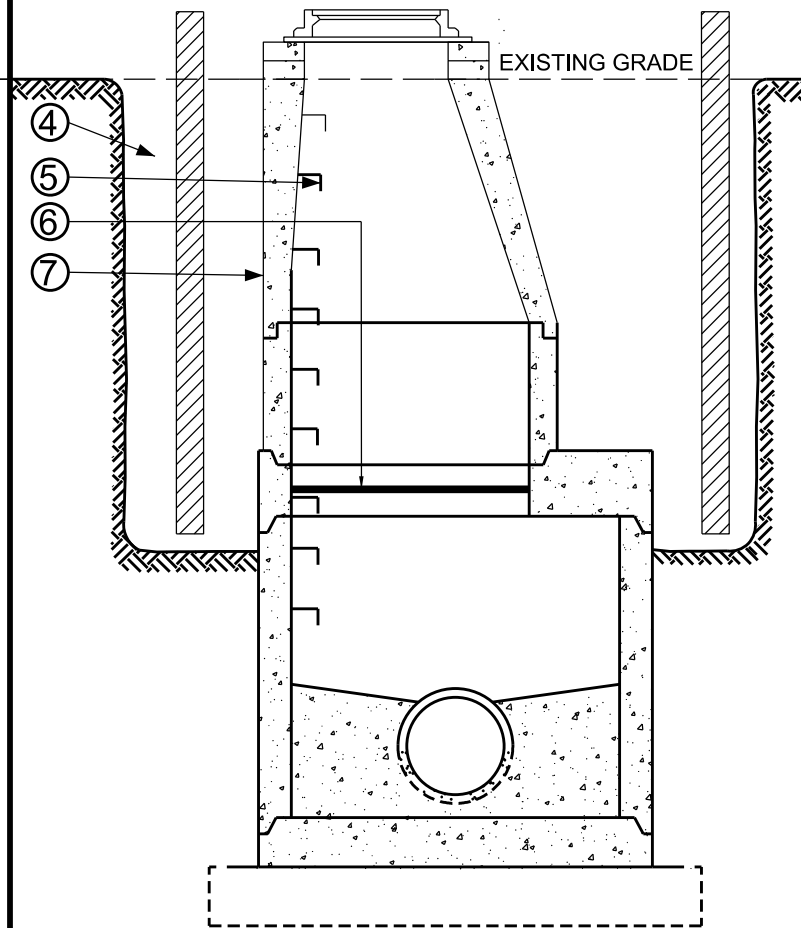


MAXIMUM HIGH FLOOD LEVEL

MAXIMUM HIGH FLOOD LEVEL

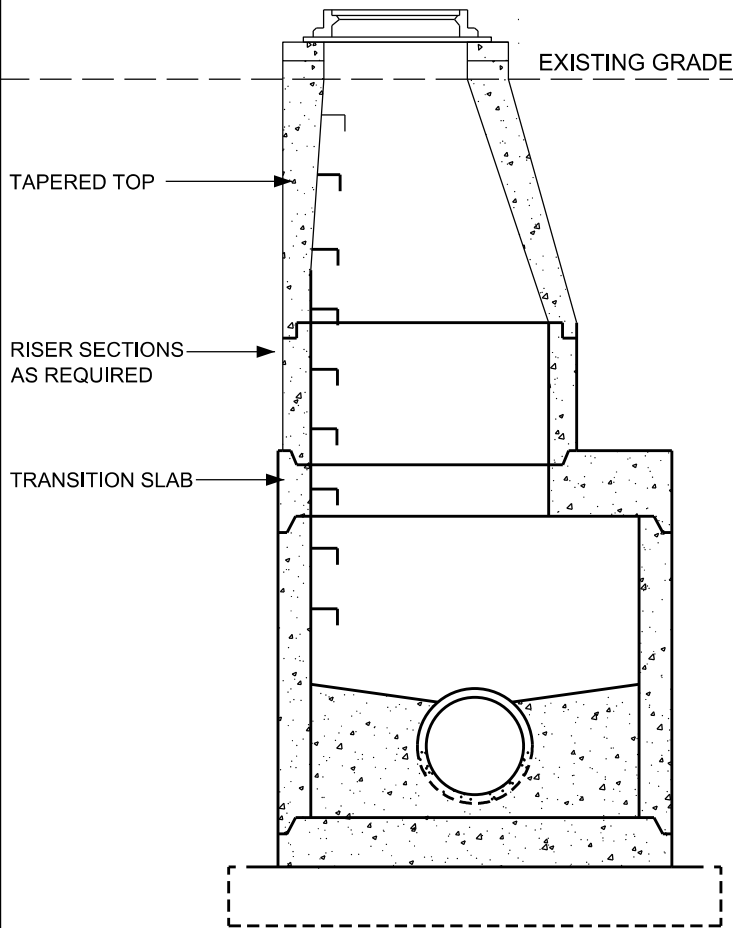

NOTES:

1. IF REQUIRED, CONSTRUCTION ACCESS PATH AS PER CONTRACT DRAWINGS AND PERMIT APPROVALS.
2. COMPLETE GEO-TECHNICAL AND HYDRO-GEOLOGICAL ASSESSMENTS FOR STRUCTURAL CAPACITY ASSESSMENT.
3. CONDUCT CONDITION ASSESSMENT OF MAINTENANCE HOLE STRUCTURE.

4. INSTALL SHORING AND EXCAVATE SOIL TO EXPOSE THE FIRST RISER SECTION BELOW THE TAPERED TOP OR PRECAST FLAT CAP
5. REMOVE EXISTING LADDER RUNGS
6. INSTALL PROTECTIVE BARRIER IN MAINTENANCE HOLE TO PREVENT CONSTRUCTION MATERIAL FROM ENTERING THE SEWER THROUGH THE MAINTENANCE HOLE.
7. REMOVE FRAME AND COVER AND CHIMNEY SECTION (TAPERED CAP OR PRECAST FLAT CAP).
8. ALL DIMENSIONS ARE NOMINAL.

All dimensions are in millimetres unless otherwise shown.

ENGINEERING & CONSTRUCTION SERVICES STANDARD DRAWING

REV 0

SEP 2019



DEMOLITION DETAIL - RAISING A MAINTENANCE HOLE WITHIN A FLOOD PLAIN

T-1120.07-1

NTS

SHEET 1