
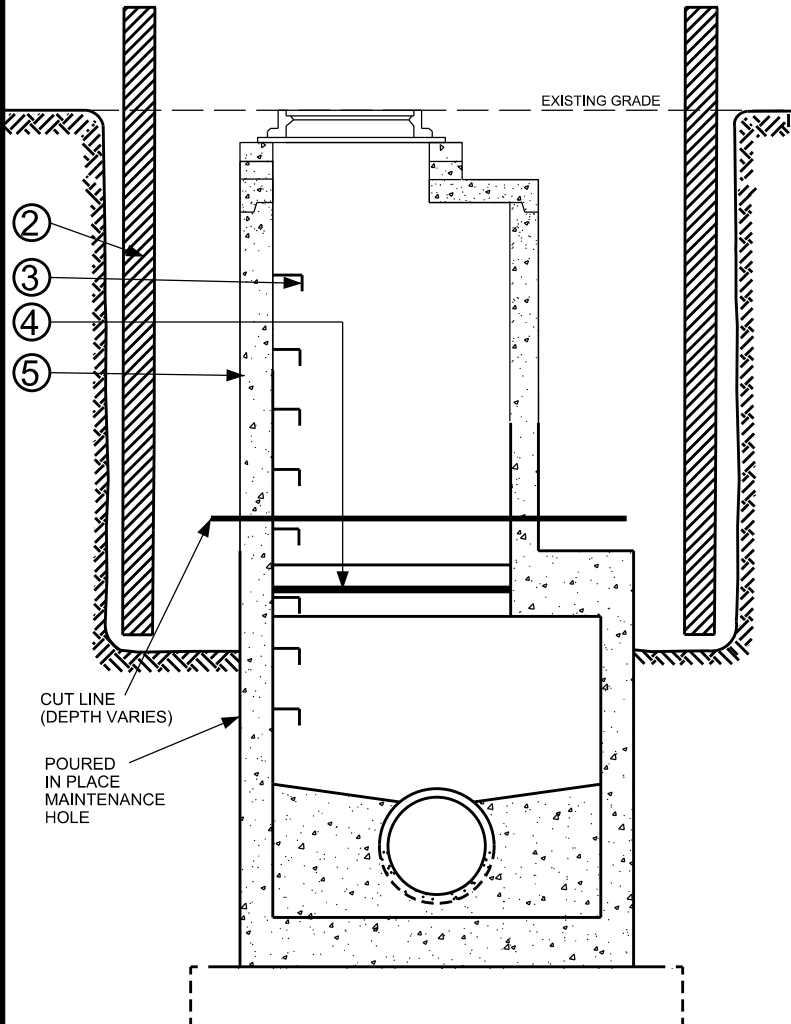


**PRECAST MAINTENANCE HOLE**

**POURED IN PLACE MAINTENANCE HOLE**

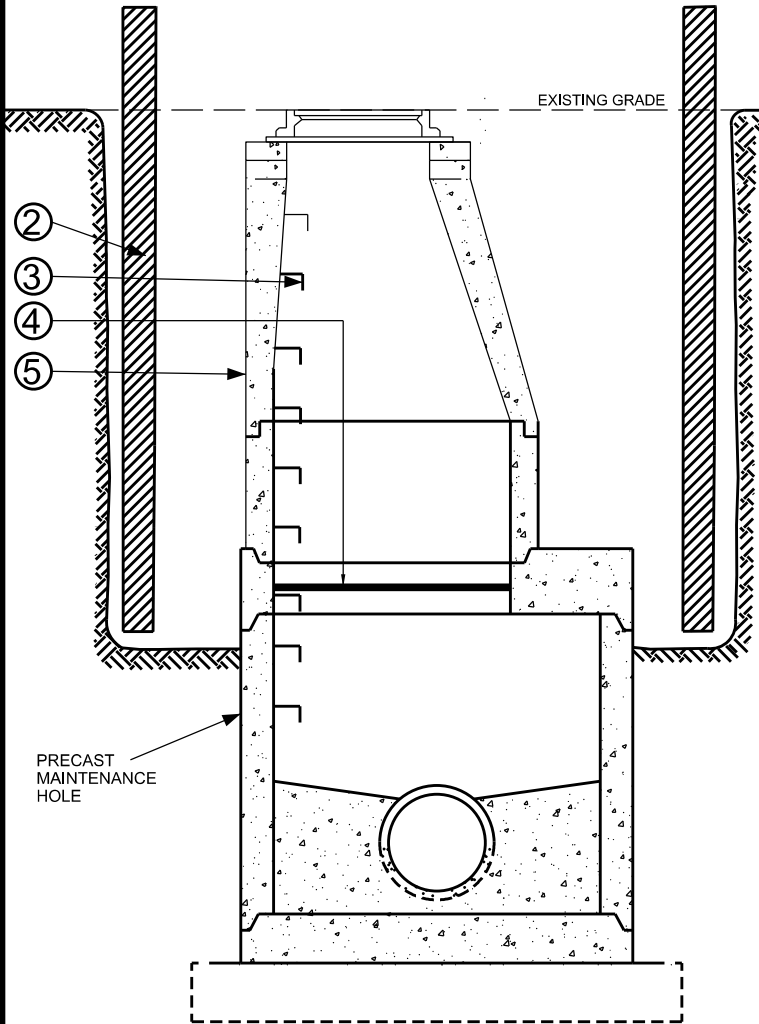

**NOTES:**

1. IF REQUIRED, CONSTRUCTION ACCESS PATH AS PER CONTRACT DRAWINGS AND PERMIT APPROVALS.
2. INSTALL SHORING AND EXCAVATE SOIL TO EXPOSE THE STRUCTURE BELOW THE CUT LINE INDICATED IN THE TENDER DOCUMENT. SHORING SHALL BE AS SPECIFIED IN THE CONTRACT. CONTRACTOR TO REVIEW THE GEOTECHNICAL REPORT PRIOR TO DESIGNING THE SHORING SYSTEM.
3. REMOVE EXISTING LADDER RUNGS WHERE SPECIFIED.
4. INSTALL PROTECTIVE BARRIER WITH SUPPORT IN MAINTENANCE HOLE TO PREVENT CONSTRUCTION MATERIAL FROM ENTERING THE SEWER THROUGH THE MAINTENANCE HOLE.
5. REMOVE FRAME AND COVER AND CHIMNEY SECTION (TAPERD CAP) AND REQUIRED RISER SECTIONS (PRECAST MAINTENANCE HOLE) OR AT THE CUT LINE (POURED IN PLACE MAINTENANCE HOLE) INDICATED IN TENDER DOCUMENT.
6. REFER TO DRAWING T-1120.04-3 OR T-1120.04-4 FOR CHIMNEY REPLACEMENT DETAILS
7. ALL DIMENSIONS ARE NOMINAL.

All dimensions are in millimetres unless otherwise shown.

ENGINEERING & CONSTRUCTION SERVICES STANDARD DRAWING

REV 0

SEP 2019

**DEMOLITION AND REMOVAL OF  
PRECAST OR POURED IN PLACE  
MAINTENANCE HOLE CHIMNEY**

**T-1120.04-1**

NTS

SHEET 1

