

Construction Update #2

September 5, 2017


Road Resurfacing, Sidewalk and Curb Repairs on James Gray Drive and Mallaby Road

Contract: 17ECS-TI-14LR
Start Date: September 11, 2017
End Date: October 9, 2017
*Timeline is subject to change.

The City of Toronto will resurface James Gray Drive and Mallaby Road and repair damaged sections of curb and sidewalk. Our inspection of the road shows that it needs resurfacing and sections of damaged curb and sidewalk need to be replaced to bring them to a state of good repair. This work will take about 4 weeks to complete.

This work is part of the Council-approved 2017 Capital Works Program to renew aging city roads and sidewalk for current and future needs.

MAP OF WORK AREA

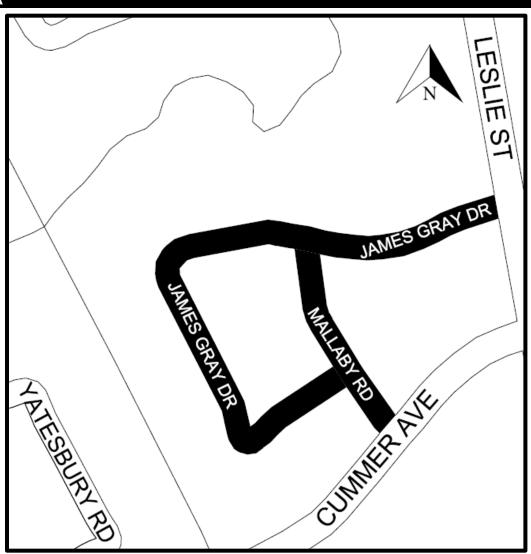

WORK DETAILS

The City's contractor will:

- Dig up the road surface
- Re-align maintenance holes and catch basins
- Repair curbs, gutters and driveways
- Repave the road surface

WHAT TO EXPECT DURING CONSTRUCTION

- You may experience dust, noise and other inconveniences. The City will make efforts to reduce the impacts. We appreciate your patience.
- Property owners should remove items located within City property limits (boulevard), such as landscaping and/or decorative objects. If you have a sprinkler system within the boulevard, please remove it.
- The City will not be responsible for damage to any privately owned items on City property.



Construction Update #2

	Work Hours: Work will take place
()	Monday to Friday from 7:00 am to 7:00 pm.
	Saturday from 9:00 am to 5:00 pm
	With work after hours and on Sunday as approved by the City.
٤	Road and Sidewalk Access: In order to complete the work in a safe manner, there will be road and sidewalk restrictions within the construction work zone. Access for emergency vehicles will be maintained at all times.
	Driveway Access: The contractor will notify you of any temporary restrictions to your driveway access. If your property has two entrances, one entrance will be kept open at all times.
\$	Traffic Management : Efforts have been made to manage traffic in the area for the safety of workers, road users and residents. Road users should expect delays and increased traffic on nearby streets.
	Traffic on will be reduced on with active construction / access may be limited when paving operations are taking place.
8	Parking: Parking in the active work zone is not permitted due to space requirements for construction equipment and materials. A separate parking notice identifying alternative parking will be issued.
Ţ.	Garbage & Recycling: Please follow your normal routine. If required, the contractor will move bins to an appropriate location and return them.
■ 0	Please ensure that you label your bins with your address.
	Restoration: The construction work area will be restored with sod and/or asphalt where required. Interlocking bricks, flagstone on a granular base, or other similar features that are removed from public and private property during construction will be replaced. Lawn seeding and/or laying of sod will be done as needed during ideal growing seasons only - in the spring (April to June) and fall (September to October).

ASBESTOS IN ASPHALT

As part of the work, the City must test the removed asphalt to be removed for asbestos. Our tests show that there is up to 2% of asbestos in the asphalt in some locations.

Asbestos was used in asphalt mixes throughout the 1970s and early 1980s to improve the performance of the asphalt. Air quality monitoring conducted by the City of Toronto at other sites has not detected asbestos fibres in the air as a result of resurfacing of asphalt. The risk of exposure to asbestos for workers and bystanders is low.

As a precaution, the City's contractor will follow these steps:

- Wet the pavement during asphalt cutting, grinding or removal
- Attach dust collecting devices with HEPA filters to equipment, where possible, to prevent dust from becoming airborne
- Provide personal protective equipment, such as disposable coveralls and respirators, to on-site workers upon request, and
- Transport and dispose of asphalt containing asbestos at provincially approved disposal sites

NEED MORE INFORMATION?

If you have questions about the upcoming work, please contact us and quote Contract 17ECS-TI-14LR.

Field Ambassador	Jason Chan, 416-497-8600 x1355, Toronto14LR@rvanderson.com
TTY Hearing Impaired Service	416-338-0889
	(7 Days a week, 8:00 am - 5:00 pm, closed holidays)
General inquiries	311
Website	toronto.ca/improvements/ward24.htm

Thank you for your patience. Building a great city takes time. Better infrastructure for all of us is worth the wait.