



PLAN

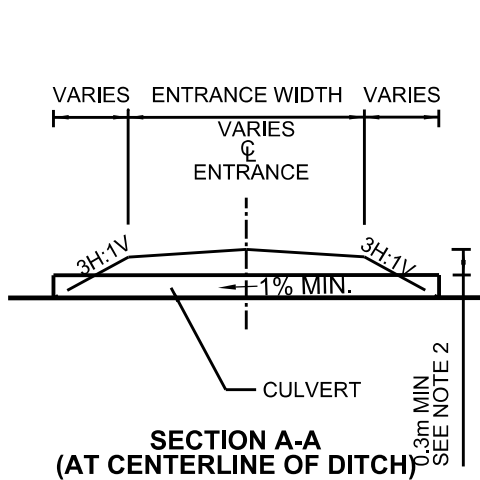

SECTION A-A
(AT CENTERLINE OF DITCH)

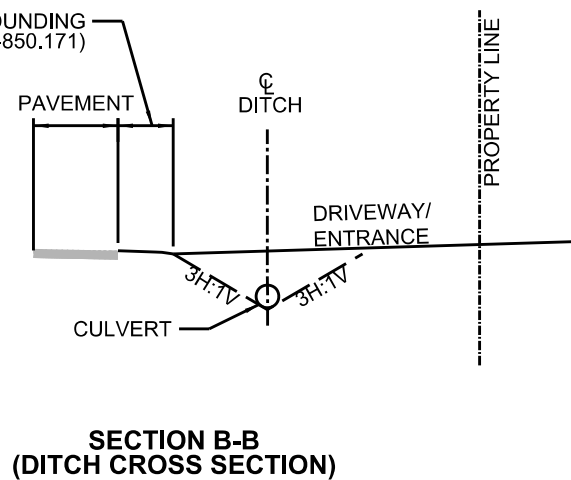

SECTION B-B
(DITCH CROSS SECTION)

NOTES:

1. DRIVEWAY CULVERTS TO BE 300mm AND ROADWAY ENTRANCE CULVERTS TO BE 600mm MIN, UNLESS OTHERWISE SPECIFIED. CULVERT LENGTH TO BE DRIVEWAY/ENTRANCE WIDTH PLUS 5.0m.
2. CULVERT TO HAVE MINIMUM 300mm COVER AT DRIVEWAY CROSSING AND 600mm COVER AT ROADWAY CROSSING.
3. MAXIMUM SLOPE OF 3H:1V ACROSS DITCH AND FROM DRIVEWAY TO DITCH INVERT.
4. INSTALL GRATE/GUARD AT END OF DRIVEWAY CULVERTS, AS REQUIRED BY PROJECT SPECIFIC SCOPE.
5. CULVERT SURROUND AS PER OPSD 802 SERIES (SELECT STANDARD BASED ON EXISTING GROUND AND PIPE MATERIAL), FROST PROTECTION AS PER 802.030 OR 802.031.

All dimensions are in millimetres unless otherwise shown.

	ENGINEERING & CONSTRUCTION SERVICES STANDARD DRAWING	REV 0	JAN 2021
	ROADWAY DITCH	T-850.172	
	DRIVEWAY ENTRANCE	NTS	SHEET 1