

- 1

precast concrete panel 'A'
see detail T-PCP 8a
- 2

precast concrete panel 'B'
see detail T-PCP 8b
- 3

200 x 200 unit paver insert
- 4

soil cells as approved by the
City of Toronto
- 5

1500 x 1600 x 9mm steel plate
- 6


75mm PVC drain pipe
detail in progress*
- 7

curb as specified
- 8

tree planting area
- 9

fill gap with HPB
- 10

bituminous board between
concrete footing and precast panel

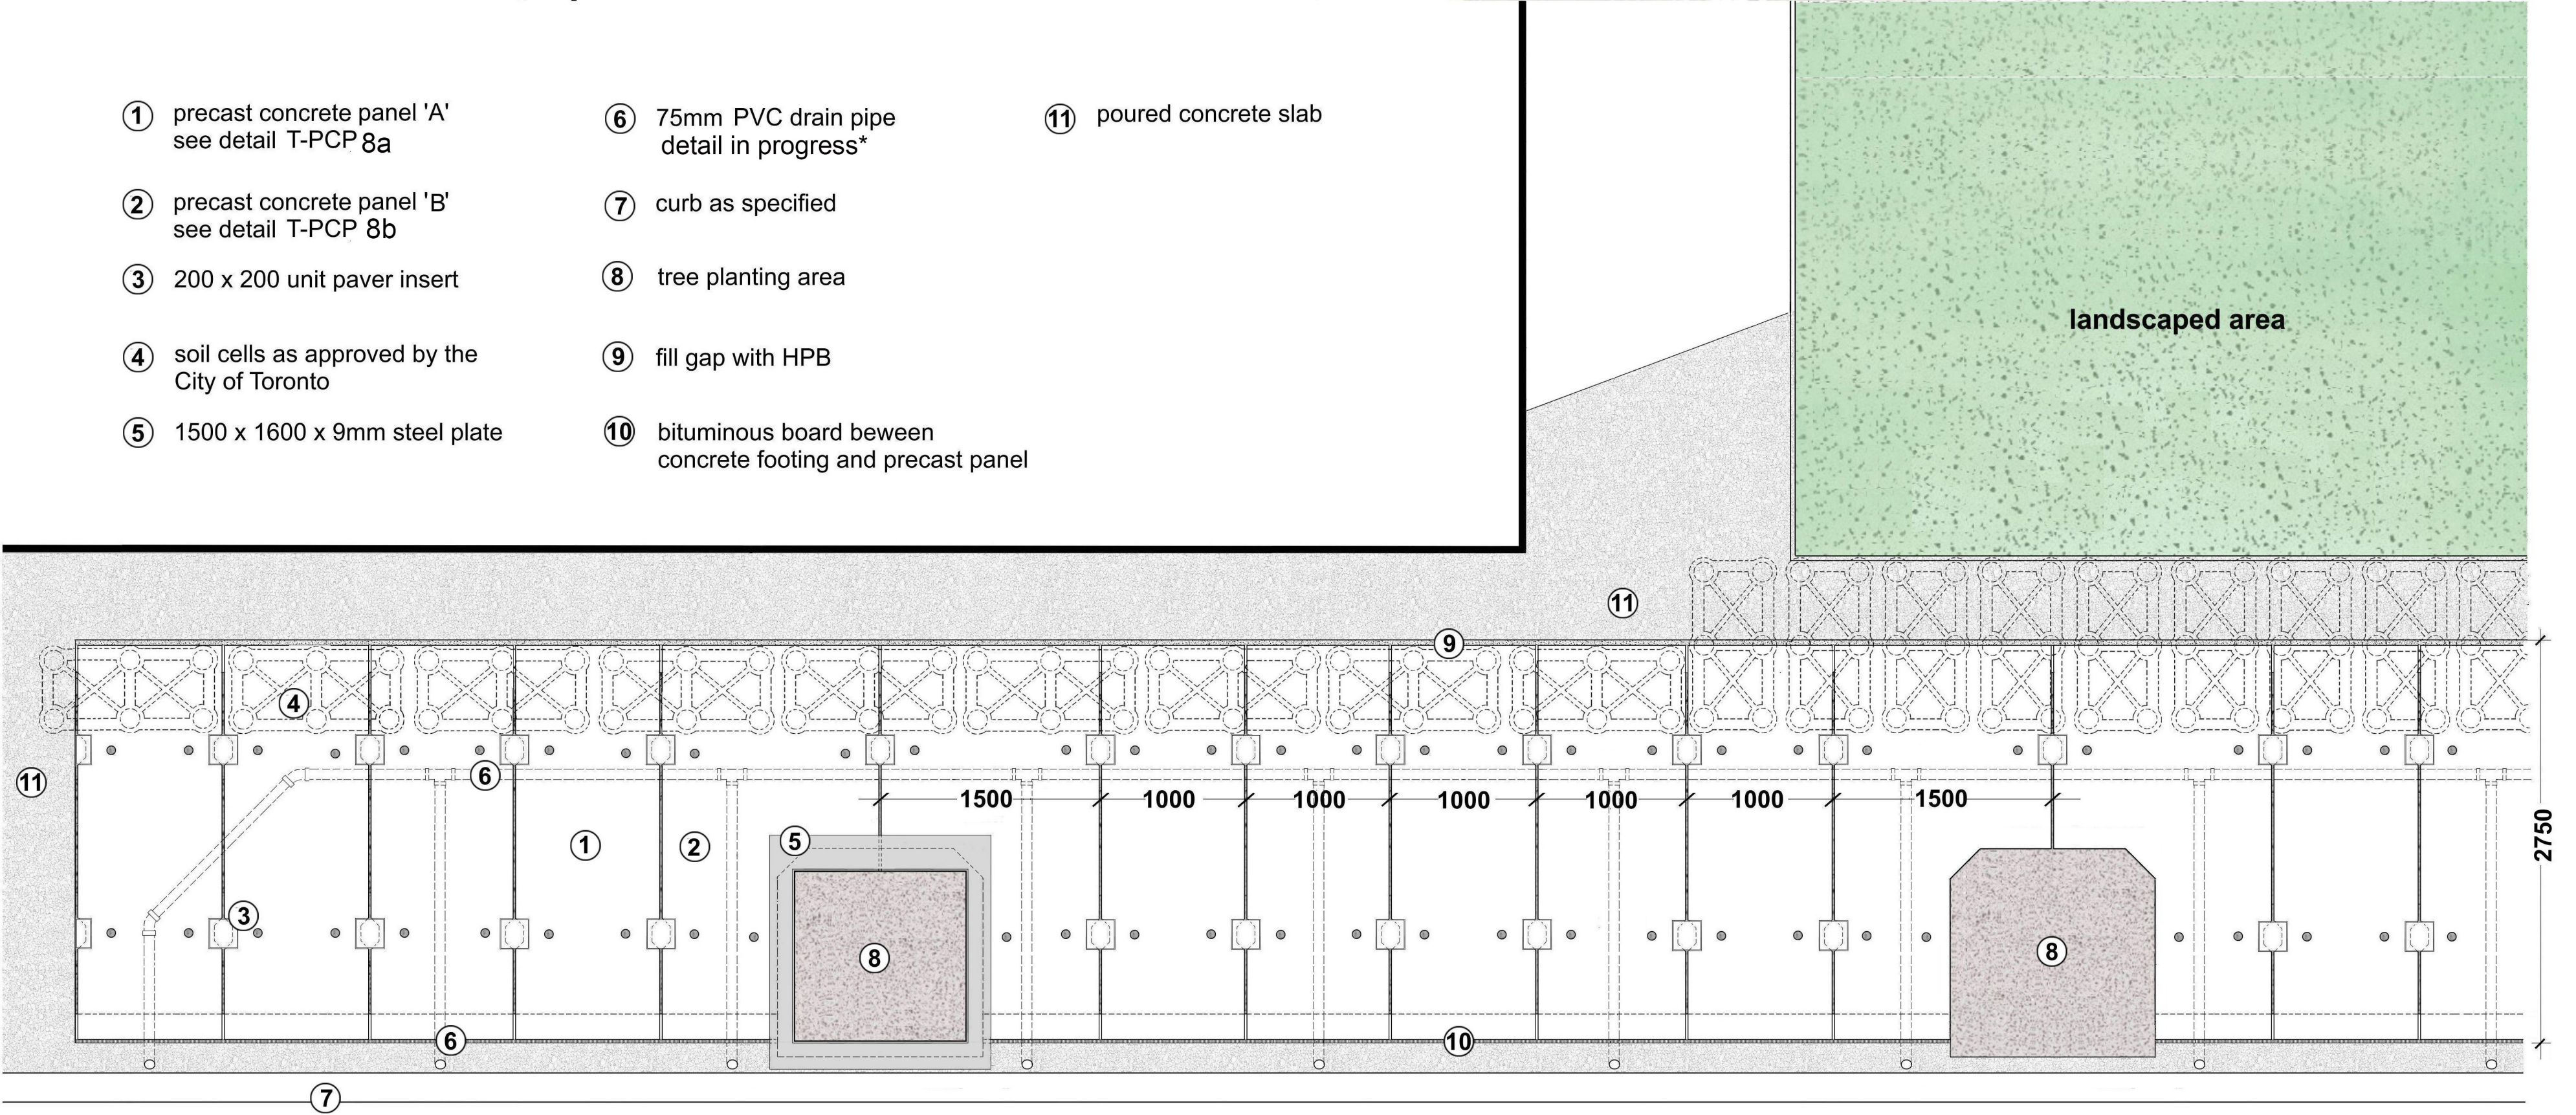

*Contact project manager for details

Tree Planting Details	precast panel and soil cell layout	Date: June 2019	 T - PCP 6.0 - 3a
		Revised:	
		Dwg. by: PS	
T - PCP series			