

November 5, 2019

Fairbank Silverthorn Basement Flooding Protection Project Phase 1: Inlet Control Devices Installation

Expected Start Date: Winter 2019 Expected End Date: Spring 2020

**Timeline is subject to change. Future notice to be provided.*

The City of Toronto is planning to install about 45 to 50 Inlet Control Devices (ICD) at the existing road catch basins (CB) to alleviate basement flooding. The ICDs restrict the flow entering the combined sewer drainage system through the catch basins on road and reduce the risk of combined sewer from being full, thus reducing risk of basement flooding. The ICD installation will increase the temporary surface ponding on the streets.

The Fairbank Silverthorn Basement Flooding Protection Project includes installing a large storm trunk sewer, new storm sewers and installing 500 ICDs. The first 50 ICDs are being installed in advance to test the ICD performance before ICD implementation in the entire area (see map on page 2 for locations).

The Project is part of the Council-approved Capital Works Program as part of the City's Basement Flooding Protection Program (BFPP). For more information regarding this project visit toronto.ca/fairbank



WORK DETAILS

The majority of the work is short in duration (2 to 4 hours at each location), located on the street at the edge of the sidewalk, signage will be used. Excavation is not required for this work so impacts to the road surface and traffic is minimal.

- Construction crews will access the catch basin, inspect, clean and make any local repairs.
- Install the ICDs inside the catch basin.

WHAT TO EXPECT DURING CONSTRUCTION

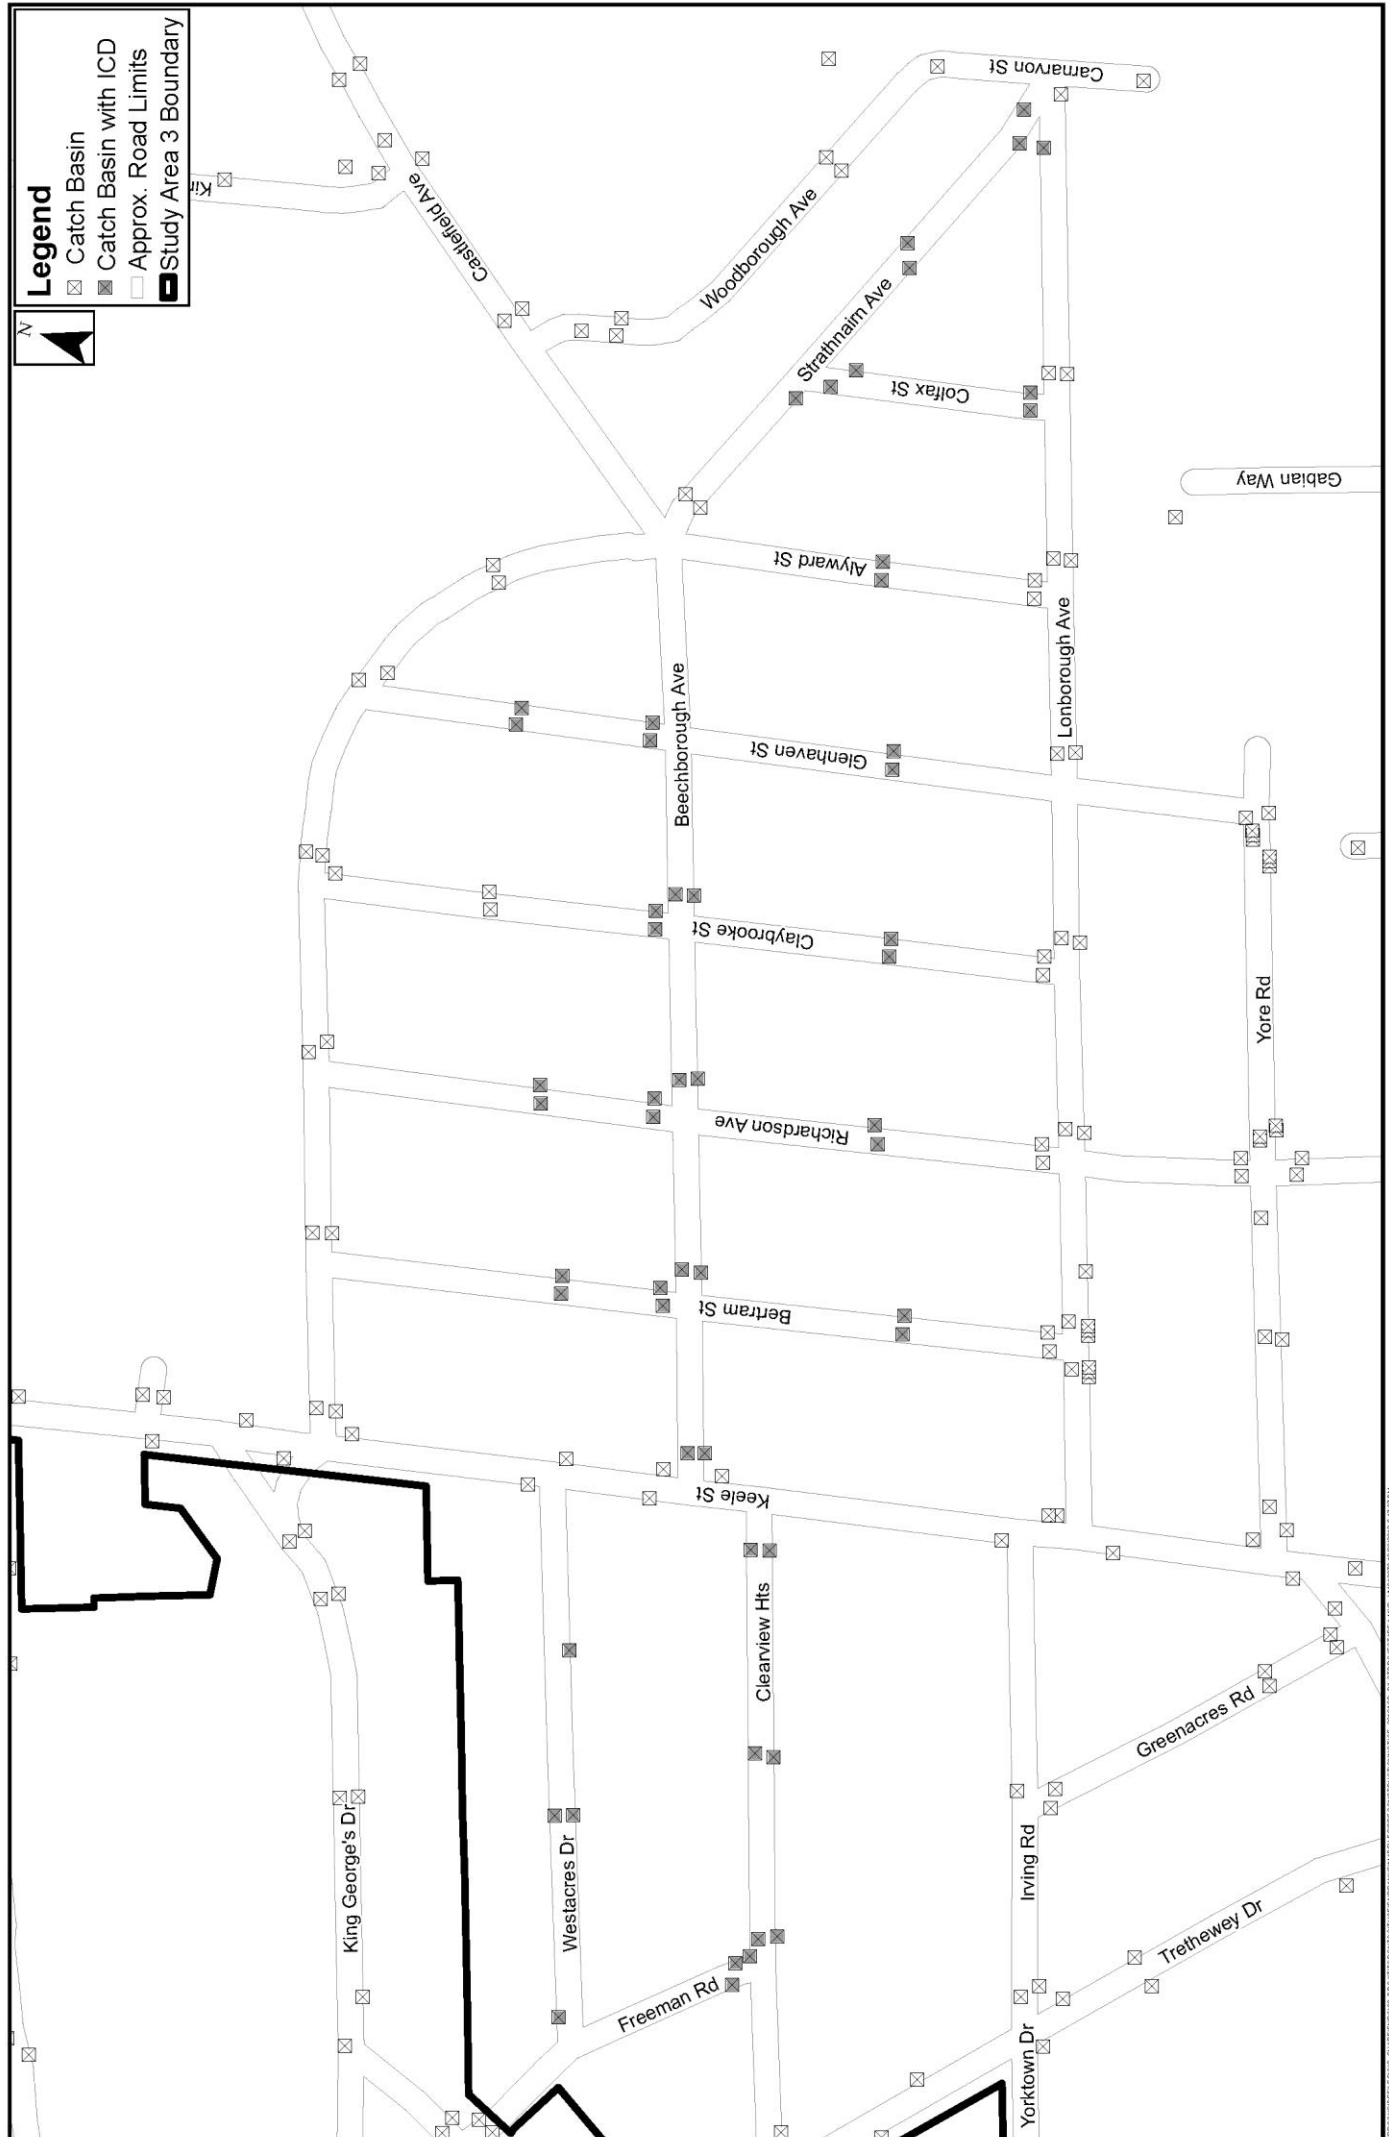
- A Construction Notice will be distributed approximately two weeks before start of construction with more detailed construction schedule and contact information of the site inspector.
- Some local parking restrictions may be in place to ensure vehicles are not parked over catch basins and access is available to the contractor. The contractor will coordinate with the home owner, in advance, if driveways are affected.
- You may experience dust, noise and other inconveniences. The City will make efforts to reduce the impact on the residential area. We appreciate your patience.

	<p>Work Hours: Construction activity on streets and along the ravine will be on from 7 a.m. to 7 p.m., Monday to Friday.</p>
	<p>Traffic Management: Road closure is not anticipated. At least, one lane will be kept open to traffic at all times. Temporary signage will be placed to guide/reroute traffic around construction zones during the construction period.</p>

NEED MORE INFORMATION?

If you have questions about the upcoming work, please contact us and quote **Contract RFP No. 9117-18-7185** or **Fairbank Silverthorn Storm Trunk Sewer System**.

Project Manager	Bashir Ahmed, 416-394-8440, Bashir.Ahmed@toronto.ca
TTY Hearing Impaired Service	416-338-0889 (7 Days a week, 8 a.m. to 5 p.m., closed holidays)
General inquiries	311
Website	toronto.ca/fairbank

MAP OF WORK AREA


Thank you for your patience. Building a great city takes time. Better infrastructure for all of us is worth the wait.