

Notice of Site Work

May 21, 2020

Soil Sampling on Murray Ross Parkway and Sentinel Road

Expected Start Date: Friday May 22, 2020 Expected End Date: August 2020 *Timeline is subject to change.

The City of Toronto is completing the engineering design work for the Keele Relief Sanitary Trunk Sewer (STS) along Murray Ross Parkway and Sentinel Road. In order to complete the engineering design, soil samples are needed to confirm the underground conditions in the planned work area. The City will be taking Soil samples at the locations noted on page 2.

IMPORTANT INFORMATION ABOUT COVID-19 AND CONSTRUCTION WORK IN TORONTO

As restrictions on construction have been lifted by the Province of Ontario, City-led infrastructure will continue to proceed. During construction, the contractor is responsible for the Health & Safety on site under the Ontario Occupational Health and Safety Act and is expected to implement COVID-19 mitigation practices. For more information on the City's response to COVID-19 please visit toronto.ca/covid-19.

WORK DETAILS

- A drilling rig will be set up at each location to take soil samples along the street and City property. The work area will be separated and demarcated from the surrounding area. Steel fencing will be used, where necessary and/or for long periods of work.
- A 6" to 8" hole will be drilled into the ground to collect soil and water samples from below the surface.
- Once the drilling is complete, a 2" pipe known as a piezometer will be placed into the ground through a borehole.
- The piezometer will sit about 1.2 meters (4 feet) above ground, and will be covered with a steel protective casing (4"x4" x 4 ft tall).
- The protective casing will have padlocks on them to provide access for ongoing ground water measurements.
- In the case where a borehole is located in an area where there is traffic, the piezometer will be placed at ground level and covered with a steel protective casing that will be flush with the road/ground level.
- Additionally, an electronic piezometer (known as Vibrating Wire Piezometer or VWP) will also be
 installed together with the pipe piezometer. The readout unit for the VWP will be encased in a
 protective steel box anchored into the ground. In case the location is in an area where there is
 traffic, the wires will be extended to the nearest boulevard area, where the steel box with the
 readout unit will be placed.

WHAT TO EXPECT DURING SITE WORK

 You may experience dust, noise and other inconveniences. The City will make efforts to reduce the impacts. We appreciate your patience.



Work Hours: Installation will take place from 7 a.m. to 7 p.m.

Monitoring will take place between from 7 a.m. to 7 p.m.

Removal will take place between from 7 a.m. to 7 p.m.



Traffic Management: Unloading and loading equipment may result in temporary disruption to local traffic. In order to complete the work effectively and in a safe manner, some pedestrian and vehicle traffic restrictions will be necessary.




Restoration: The sampling areas will be restored when work is complete.



Notice of Site Work

MAP OF WORK AREA

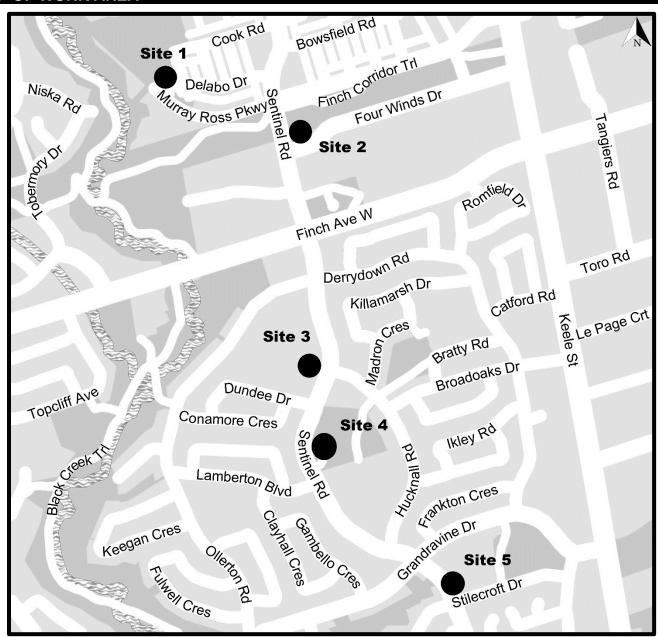

The following soil sampling locations are shown on the map above:

- 1. west limit of Murray Ross Parkway
- 2. Sentinel Road at Four Winds Drive
- 3. Sentinel Road at Hucknall Road
- 4. Sentinel Road at Sentinel Park
- 5. Sentinel Road at Stilecroft Drive

NEED MORE INFORMATION?

If you have questions about the upcoming work, please contact us and quote 9117-19-7221.

Project Manager	Shivan Narine, 416-392-4062, Shivan.Narine@toronto.ca
TTY Hearing Impaired Service	416-338-0889 (Daily, 8 a.m. to 5 p.m., closed holidays)
General inquiries	311
Website	toronto.ca/improvements/ward6.htm
	toronto.ca/improvements/ward7.htm

Thank you for your patience. Building a great city takes time. Better infrastructure for all of us is worth the wait.