


DIMENSION A	MASS (kg)
100	61
150	95
200	129
250	164
300	198
350	233
400	267
450	302
500	336
550	371

**NOTES :**

1. DESIGNED AND MANUFACTURED ACCORDING TO CSA A257.4.
2. MINIMUM CONCRETE STRENGTH AT 28 DAYS: 35 MPa.
3. REINFORCEMENT MINIMUM YIELD STRENGTH: 500 MPa.
4. 25 mm MINIMUM COVER ON ALL REINFORCING STEEL.
5. REINFORCEMENT CENTERED IN WALL  $\pm 10$ mm.
6. 350 UNIT IS DEPICTED. DIMENSIONS SHOWN FOR 350 UNIT ARE TYPICAL FOR ALL PIECES.
7. UNITS SMALLER THAN 250 mm USE A SINGLE REINFORCEMENT HOOP, MINIMUM W6 WIRE.

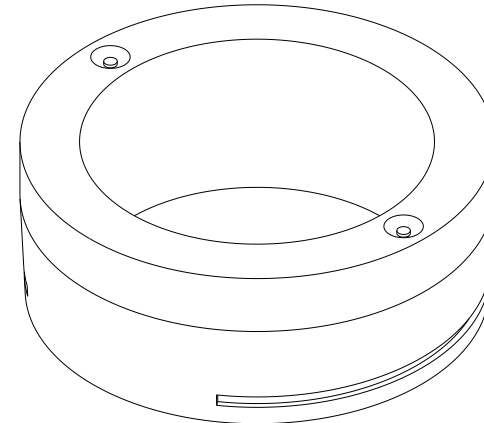

All dimensions are in millimetres unless otherwise shown.

ENGINEERING & CONSTRUCTION SERVICES STANDARD DRAWING

REV 0 SEP 2023



**IFC CONCRETE ADJUSTMENT UNIT**

**T-1120.09-3**

NTS SHEET 1