


SECTION B-B

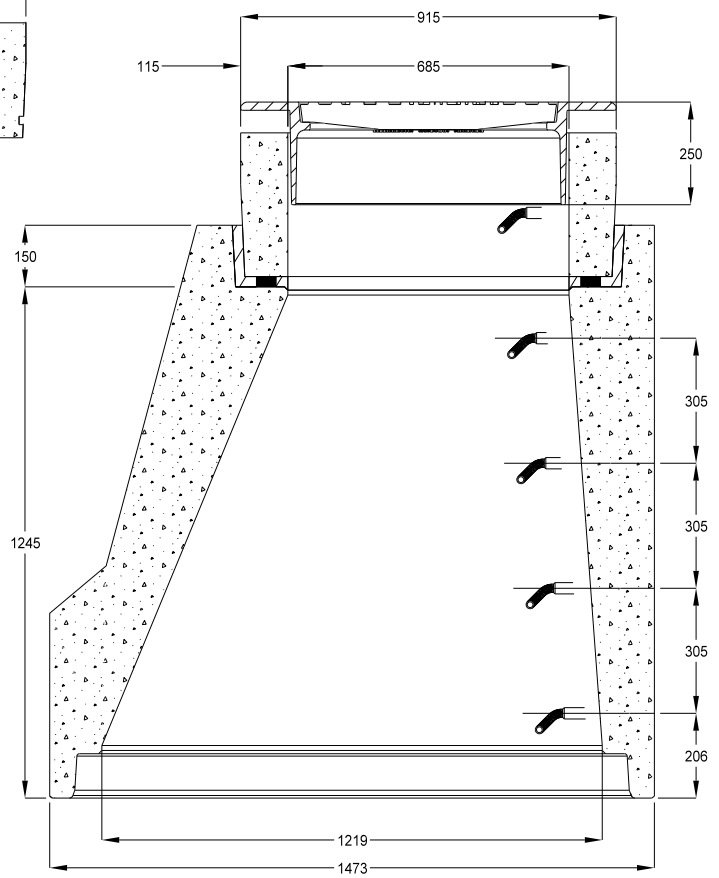

SECTION A-A

- NOTES :
1. MINIMUM CONCRETE STRENGTH AT 28 DAYS: 30 MPa.
 2. REINFORCEMENT: AS PER CSA A257.4.
 3. 25 mm MINIMUM COVER ON ALL REINFORCING STEEL.
 4. CONCRETE ADJUSTMENT UNIT CAN BE ORIENTED TO SUIT HEIGHT AND ANGLE REQUIRED. UNIT DEPICTED IS 350mm.
 5. GROUT REQUIREMENTS: NON-SHRINK; MINIMUM 50 MPa AT 28 DAYS; TO BE INSTALLED ONLY AS PER MANUFACTURER APPLICATION GUIDELINES.
 6. COVER DEPICTED IS ACCORDING TO OPSD 401.01, TYPE A. OTHER OPS COMPLIANT COVERS AVAILABLE.

DIMENSION	NOTES
A	ADJUSTMENT RANGE: 25 - 100mm.
B	STANDARD HEIGHT, CONCRETE ADJUSTMENT UNIT (CAU): 350mm. ALSO AVAILABLE: 100, 150, 200, 250, 300, 400, 450, 500, 550mm.
C	DUCTILE IRON FRAME ADJUSTMENT RANGE: 70 - 200 mm.
D	OVERALL ADJUSTMENT: MIN 195 mm (USING 100mm CAU) MAX 850 mm (USING 550mm CAU)

All dimensions are in millimetres unless otherwise shown.

ENGINEERING & CONSTRUCTION SERVICES STANDARD DRAWING

REV 0 SEP 2023



IFC MAINTENANCE HOLE TAPERED TOP ASSEMBLY

T-1120.09-2

NTS SHEET 1