

October 23, 2020

Basement Flooding Protection Program Infrastructure Upgrades on Jane Street, Wilson Avenue and Other Local Roads

Contract: 19ECS-LU-01FP

Start Date: Late October 2020 End Date: March 2023



**Timeline is subject to change.*

Further to the Construction Notice issued in late September, 2020 below is a list of the City construction planned to take place on streets as part of Basement Flooding Contract 19ECS-LU-01FP.


Street	Sanitary Sewer Upgrades	Storm Sewer Upgrades	Watermain Replacement	Inlet Control Devices
Buxton Road	-	✓	✓	-
Calvington Drive	✓	✓	-	-
Camborne Avenue	-	✓	✓	-
Canton Avenue	-	-	-	✓
Chalkfarm Drive	✓	✓	-	✓
Clevedon Street	-	✓	-	-
Dachet Road	-	✓	-	-
Dalsby Road	-	✓	-	-
Dana Avenue	-	✓	✓	-
Deevale Road	-	✓	✓	-
Epsom Downs Drive	-	✓	-	-
Exbury Road	-	✓	✓	✓
Forthbridge Crescent	✓	✓	-	-
Gatesgill Crescent	-	-	-	✓
Heathrow Drive	-	✓	✓	-
Jane Street	✓	✓	-	✓
Julian Road	-	✓	-	-
Letchworth Crescent	-	✓	✓	✓
Lexfield Avenue	-	✓	-	-
Monclova Road	-	✓	-	-
Neames Crescent	✓	✓	-	✓
Peacham Crescent	-	✓	-	-
Richard Clark Drive	-	✓	✓	✓
Smallwood Drive	-	✓	-	-
Tavistock Road	-	✓	-	✓
Troutbrooke Drive	-	✓	-	✓
Tumpane Street	✓	✓	✓	✓
Victory Drive	-	✓	✓	-
Westcliffe Road	-	✓	-	-
William Cragg Drive	✓	✓	✓	✓
Wilson Avenue	✓	✓	✓	-



Inlet Control Devices: In addition to underground sanitary sewer, storm sewer and watermain work, this project also includes the installation of Inlet Control Devices (ICDs) inside existing road catch basins on various streets. The ICDs restrict the rain water entering the storm sewer system through the catch basins on the road in locations where there is limited capacity in the sewer.

	<p>Substandard Water Service Replacement: The water service is the underground pipe that brings water to your water meter and is owned by you and by the City. The part you own is from your house to the end of your property, the part the City owns is from the end of your property to the watermain. During construction, water services will be exposed by the Contractor to assess the pipe material and size. If it is found that a water service is made of lead or undersized the Contractor will replace the City-owned portion.</p>
	<p>Restoration: During installation of sanitary sewers, storm sewers and watermains, surfaces in the roadway and boulevard areas will be disturbed. Following the completion of the underground work, all disturbed areas will be restored with sod and/or asphalt where required to its initial condition. Concrete sidewalks and curbs damaged during construction will also be restored.</p> <p>Interlocking bricks, flagstone on a granular base, or other similar features that are removed from public and private property during construction will be replaced. Lawn seeding and/or laying of sod will be done as needed during ideal growing seasons only - in the spring (April to June) and fall (September to October).</p>

MAP OF WORK AREA

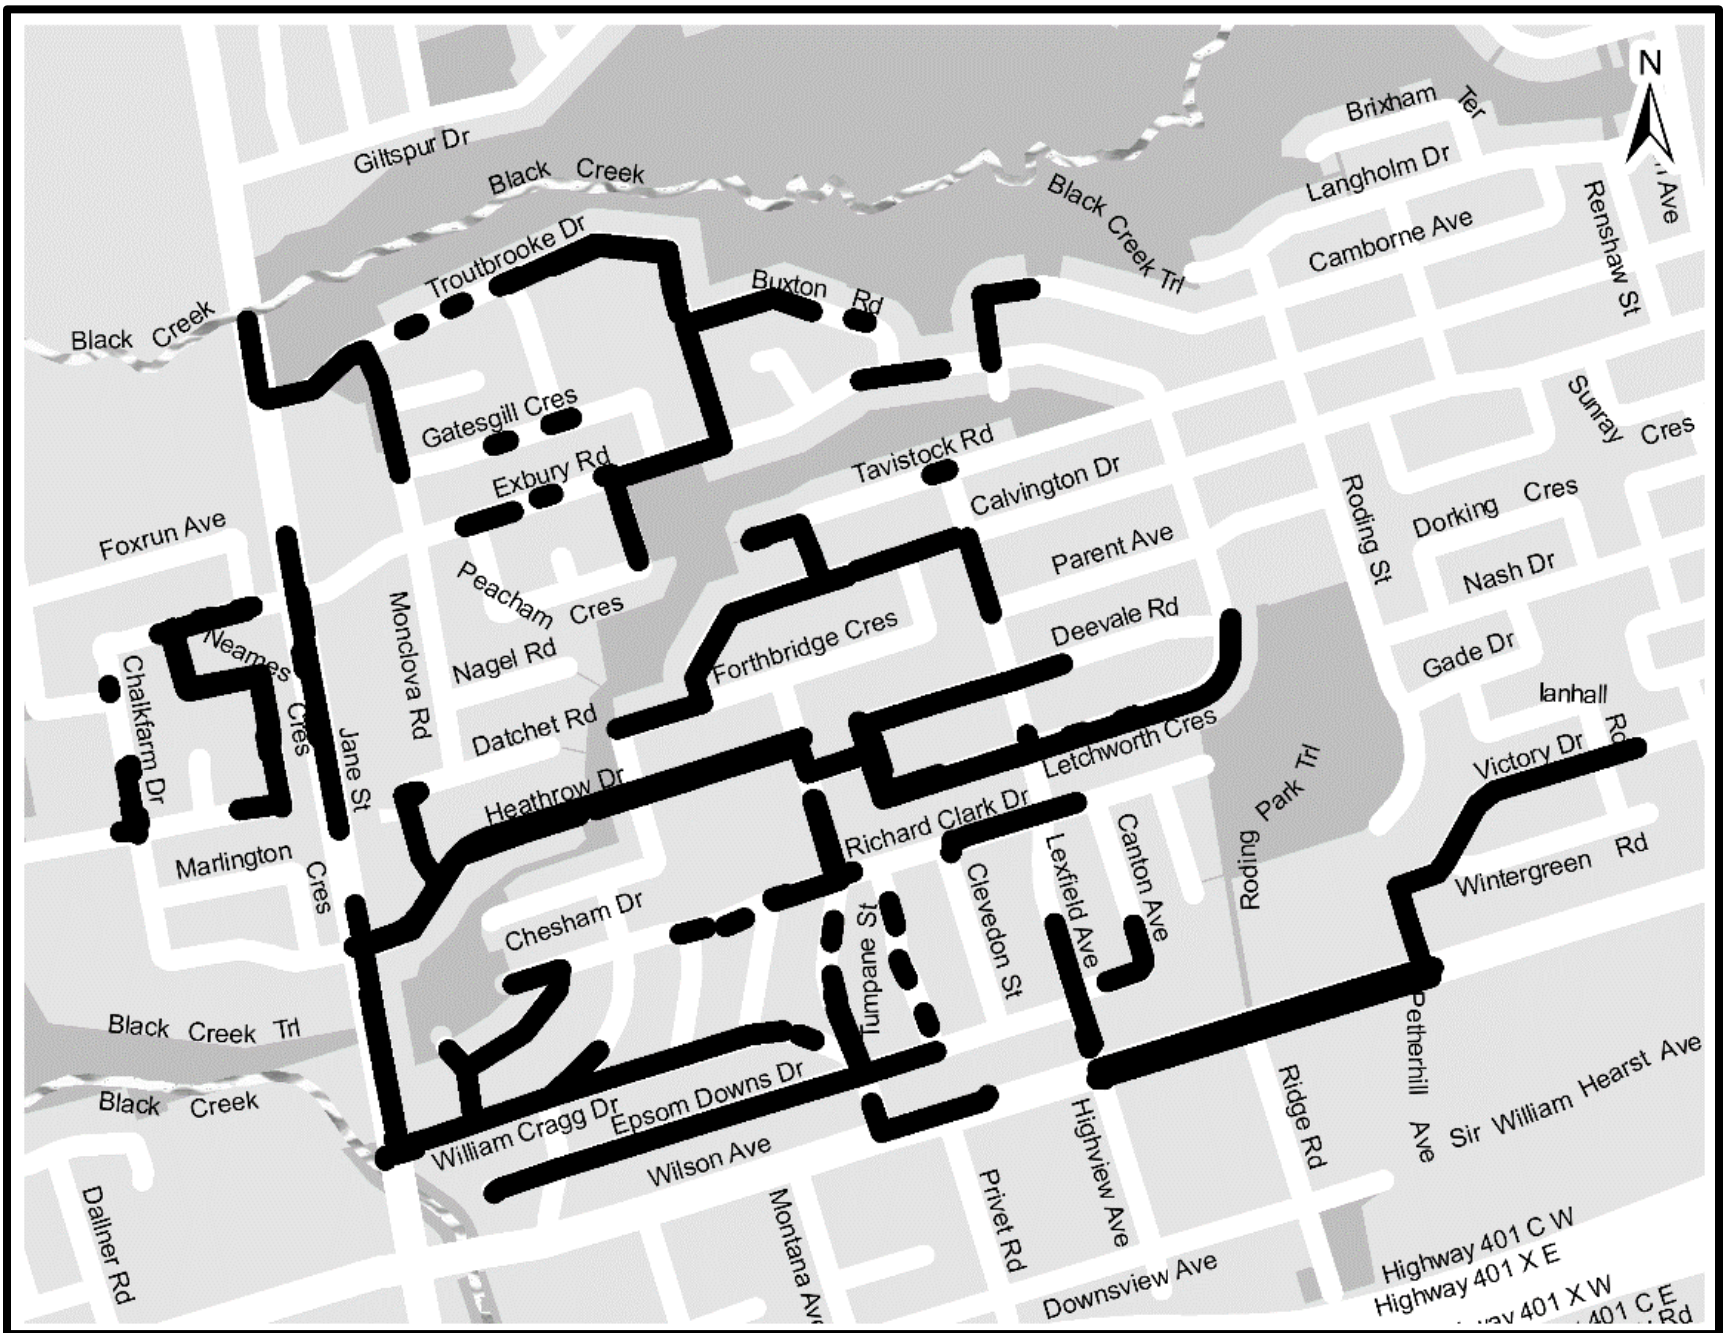

NEED MORE INFORMATION?

If you have questions about the upcoming work, please contact us.

Contract	19ECS-LU-01FP
Field Ambassador	Janet Webster, 416-338-5497, bfpp@toronto.ca
TTY Hearing Impaired Service	416-338-0889 (7 Days a week, 8 a.m. to 5 p.m., closed holidays)
General inquiries	311
Website	toronto.ca/improvements/ward6.htm or toronto.ca/improvements/ward7.htm