

October 26, 2020

Yellow Creek Outfall Restoration South of St. Clair Avenue East

Contract: 19ECS-LU-02SM
Expected Start Date: November 9, 2020
Expected End Date: May 31, 2021

**Timeline is subject to change.*


The City of Toronto will remove a failed 1350 mm storm sewer outfall and install a new pipe extension and headwall at Yellow Creek (identified on map as Trib. Don River) south of St. Clair Avenue (see map below). This work will also involve restoring the nearby channel bed and banks.

This project is part of the Council-approved 2020 Capital Works Program that will address restoring failed outfalls and will improve water quality in Yellow Creek.

IMPORTANT INFORMATION ABOUT COVID-19 AND CONSTRUCTION WORK IN TORONTO

During construction, the contractor is responsible for the Health & Safety on site under the Ontario Occupational Health and Safety Act and is expected to implement COVID-19 mitigation practices. For more information on the City's response to COVID-19 please visit toronto.ca/covid-19.

MAP OF WORK AREA

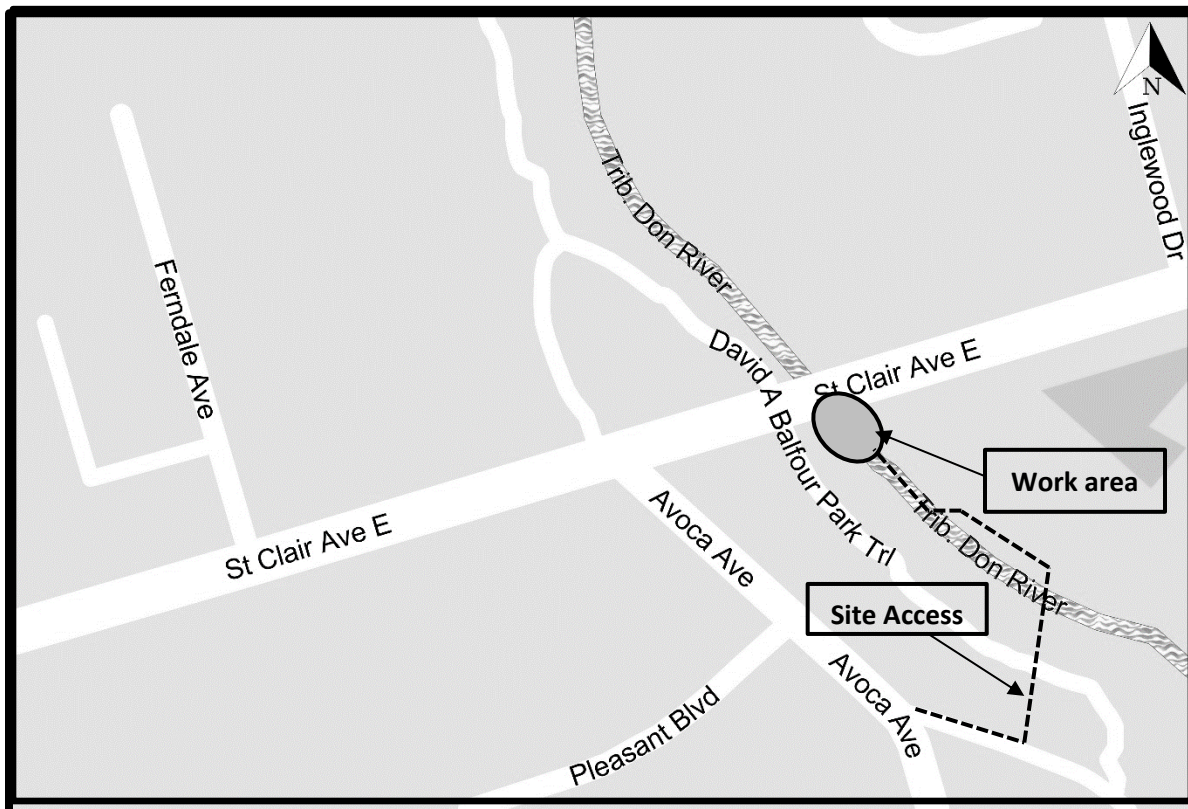






WORK DETAILS

The City's contractor will:

- Access the work area along David Balfour Park Trail (as shown on the map below), which will be kept open for park users;
- Manage pedestrian traffic at the construction access to ensure construction equipment safely enters and exits the site with minimal disruptions;
- Work within the creek to remove the failed outfall and construct a new outfall including creek bed and bank works to improve stability and water quality in Yellow Creek; and
- Restore all areas affected by construction.

WHAT TO EXPECT BEFORE CONSTRUCTION

- Work crews may mark underground utilities near the access routes and work areas, such as gas, water and cable to ensure they are not affected by the proposed work.
- You may experience dust, noise and other inconveniences. The City will make efforts to reduce the impacts. We appreciate your patience.
- The City will not be responsible for damage to any privately owned items on City property.

	<p>Tree Removal: Due to the nature of this project, the City will have to remove trees in the ravine. A tree removal permit has been obtained in coordination with the City's Parks, Recreation & Forestry Division. Trees removed for the project will be replaced using a replacement ratio of three trees planted for every one tree removed.</p>
	<p>Work Hours: Work will take place from 7 a.m. to 7 p.m., Monday to Friday, with work after hours and on weekends as required.</p>
	<p>Road and Sidewalk Access: Efforts have been made to manage sidewalk and trail use for the safety of pedestrians. There may be minor disruptions due to mobilization of equipment and materials to the site.</p>
	<p>Traffic Management: In order to complete the work in a safe manner, there will be road and sidewalk restrictions within the construction work zone. Access for emergency vehicles will be maintained at all times.</p> <p>Efforts have been made to manage traffic in the area for the safety of workers, road users and residents.</p>
	<p>Restoration: The areas affected by this construction activities will be restored where required. Restoration such as seeding will be done as needed during ideal growing seasons only – in the spring (March to April).</p>

NEED MORE INFORMATION?

If you have questions about the upcoming work, please contact us.

Contract	19ECS-LU-02SM
Project Manager	Kumar Sivakumaran, 416-392-9642, kumar.sivakumaran@toronto.ca
TTY Hearing Impaired Service	416-338-0889 (7 Days a week, 8 p.m. to 5 p.m., closed holidays)
General inquiries	311
Website	toronto.ca/improvements/ward11.htm toronto.ca/improvements/ward12.htm
City of Toronto COVID-19 Information Toronto.ca/covid-19	

Thank you for your patience. Building a great city takes time. Better infrastructure for all of us is worth the wait.