


### FOR USE WITH RIGID PAVEMENT

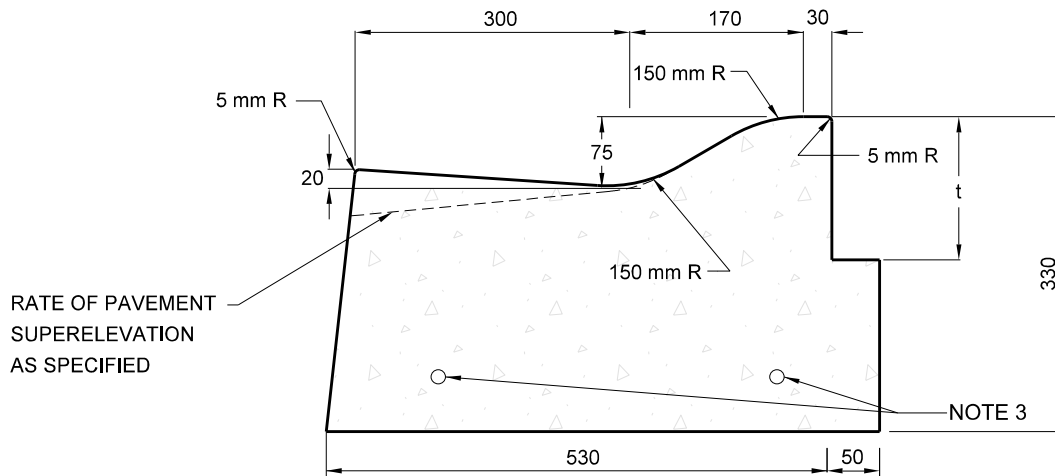

### FOR USE WITH FLEXIBLE PAVEMENT

**NOTES:**

1. EXPANSION JOINTS SHALL BE SPACED 6 m APART OR COINCIDE WITH EXPANSION JOINTS IN ADJACENT SIDEWALK AND CONCRETE ROAD BASE.
2.  $t = 130$  mm, 150 mm, OR 180 mm TO SUIT CONCRETE SIDEWALK, CONCRETE BOULEVARD OR CONCRETE DRIVEWAY MEASURED FROM TOP OF CURB DEPRESSION.
3. 2 - 15 M REINFORCING BARS FOR INDUSTRIAL AND COMMERCIAL DRIVEWAYS, 50 mm CONCRETE COVER, TO BE EXTENDED 600 mm BEYOND WIDTH OF DRIVEWAY ON EACH END.
4. ENTRANCE TERMINATION ACCORDING TO DRAWING T-350.01.

All dimensions are in millimetres unless otherwise shown.



ENGINEERING & CONSTRUCTION SERVICES STANDARD DRAWING  
**SEMI-MOUNTABLE CONCRETE CURB AND GUTTER**

REV 0 SEP 2024

**T-600.09-1**

NTS SHEET 1