


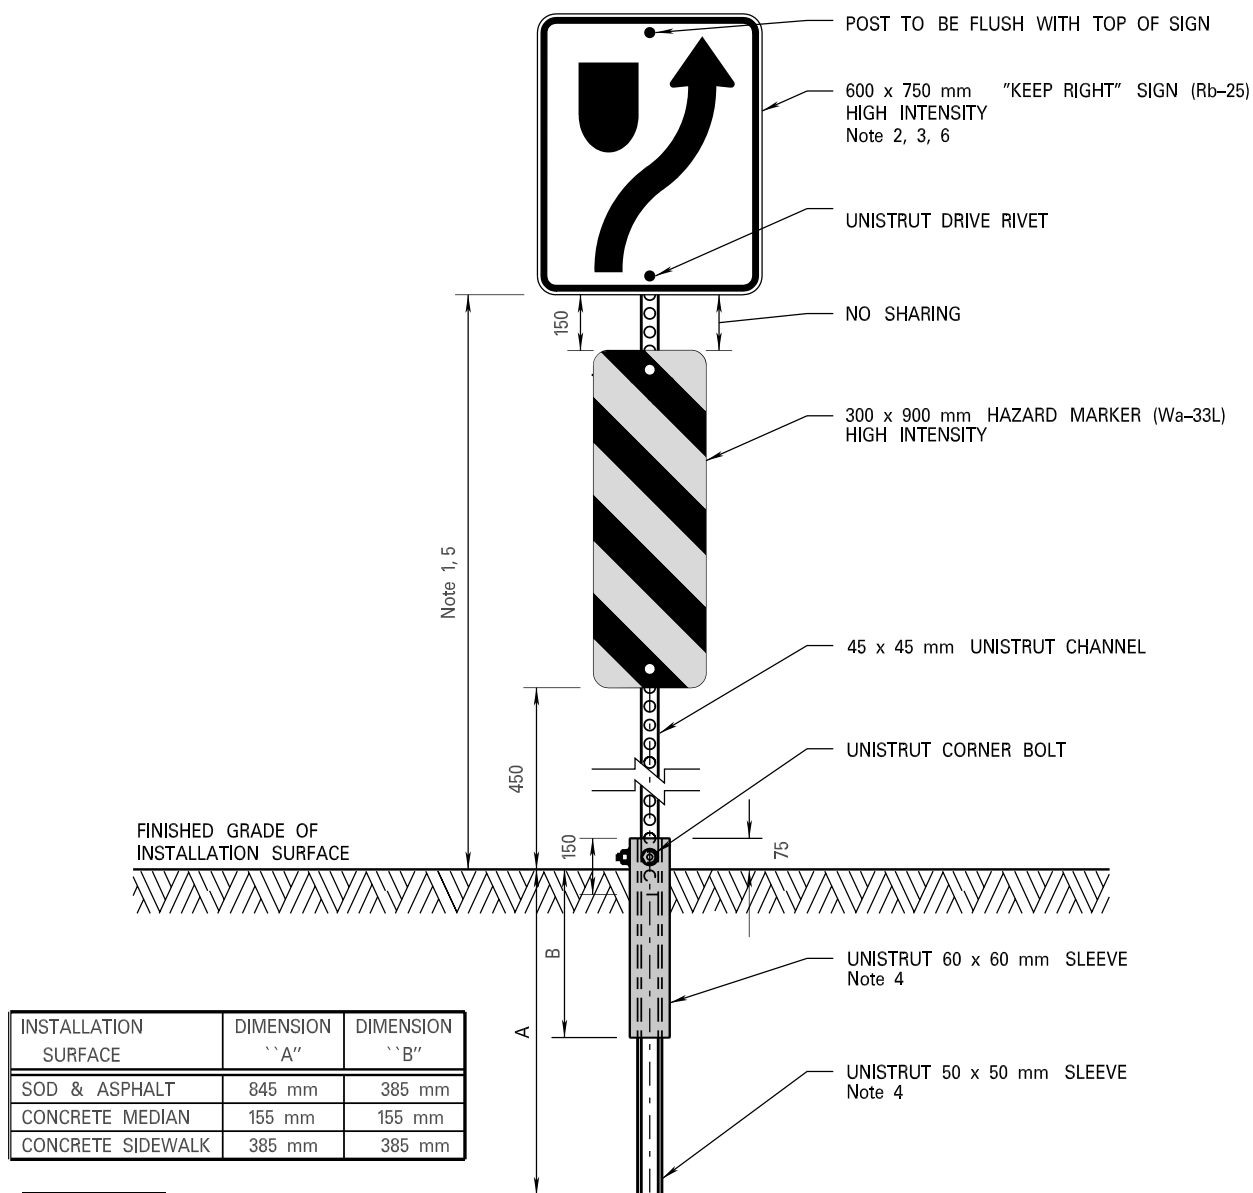

NOTES

- For post length, refer to layout drawings.
 - For sign installation on wood poles use 9.4 x 64 mm galvanized steel lag screws and washers, or drive rivets in conjunction with bracket from MTTD 814.025.
 - For sign installation on concrete or steel poles, use 16 mm stainless steel strapping and bracket to MTTD 814.025.
 - Unistrut sleeve-in-sleeve assembly flush at top, provide unistrut driving cap and the assembly into ground.
 - Bottom of individually mounted sign to be 2.1 m, unless otherwise specified.
 - Traffic sign according to layout drawing.
- A. All dimensions are in millimetres or metres unless otherwise shown.