

June 9, 2025

Watermain Replacement and Road Resurfacing on University Avenue from College Street to Armoury Street

Contract: 24ECS-LU-06SU

Start Date: Summer 2025 | End Date: Fall 2025

**Timeline is subject to change.*

The City of Toronto plans to replace the watermain and the City-owned portion of substandard water services on the east side of University Avenue from College Street to Armoury Street. Additionally, roadway resurfacing with pavement marking upgrades will also be completed. Due to ongoing Metrolinx construction, the watermain and restoration work between Queen Street West and Armoury Street will be rescheduled to a later date.

The pavement marking upgrades includes changing the existing parking lane into a vehicle travel lane allowing for through traffic and right turns at intersections. Once constructed, parking will be permitted during non-peak hours.

The following safety improvements have been identified in support of the Council-approved Vision Zero Road Safety Plan:

- Adjustments to the existing lane widths, including vehicular travel lanes and parking lanes to meet City standards from College Street to Dundas Street West.
- Curb radii reductions throughout the project area, where feasible, to tighten up intersection corners and slow down turning motorists and improve pedestrian and cycling crossing safety.
- Installation of other pedestrian accessibility features, such as AODA-compliant curb ramps and tactile warning strips.
- Upgrades to existing pavement markings.


The water service is the underground pipe that brings water to your water meter and is owned by you and by the City. The part you own is from your house to the end of your property, the part the City owns is from the end of your property to the watermain.

This project is part of the Council-approved 2024 Capital Works Program to renew our aging infrastructure, improve water distribution and reduce the risk of watermain breaks.

IMPORTANT INFORMATION ABOUT LEAD WATER SERVICES

If you live on University Avenue in a dwelling that was built before the mid-1950s, your water service may be made of lead. Please read the attached fact sheet with important information about the risks of lead in drinking water, especially if someone in your house is pregnant, there are children under six years old, or there is an infant drinking formula made using tap water.

MAP OF WORK AREA

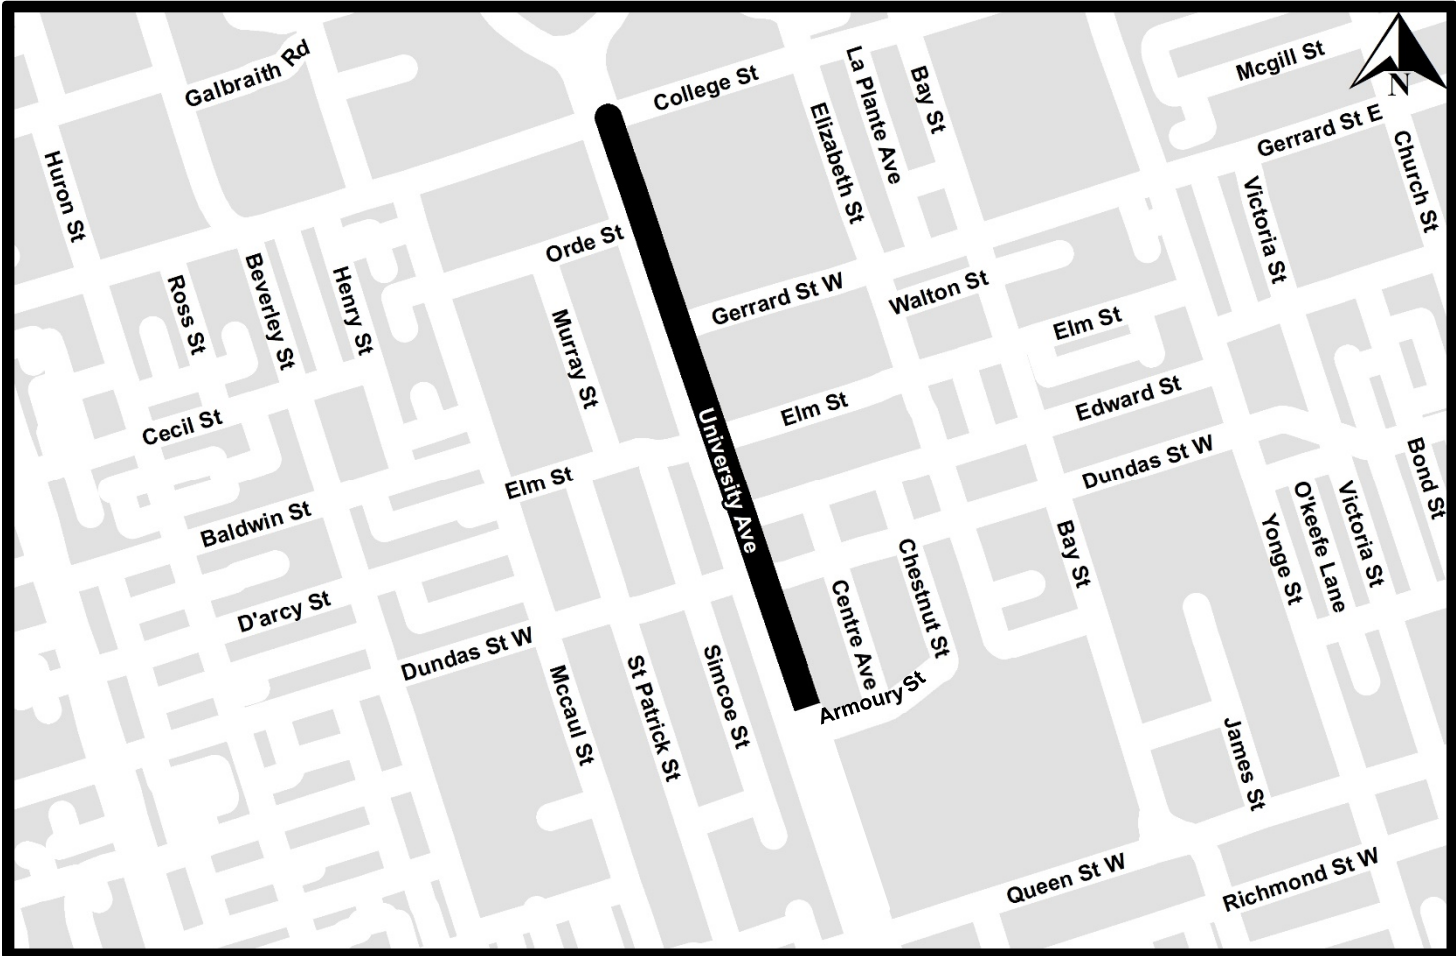











WORK DETAILS



- The City’s contractor will:
- Excavate the road and dig a trench to access and install the two new watermain.
 - Replace any City-owned water service pipes that do not meet City standards from the watermain to the private property line.
 - Resurface the road and watermain trench.

WHAT TO EXPECT DURING CONSTRUCTION

- You may experience dust, noise and other inconveniences. The City will make efforts to reduce the impacts. We appreciate your patience.
- The City will not be responsible for damage to any privately owned items on City property.

	<p>Work Hours: Work will take place from 7 a.m. through the night to 7 a.m. the next morning on weekdays and weekends as required. This is in an effort to reduce the duration of traffic impacts and accelerate the project.</p>
	<p>Pre-Construction Inspection: OZA Inspections Ltd., under contract to the City of Toronto, will survey all properties within 30 metres of the construction area before construction starts. The inspection will look at the interior and exterior of all properties to verify existing conditions. Although participation is voluntary, the City encourages all homeowners to participate. Without the survey, it will be difficult to confirm any claims of damage caused by construction.</p> <p>Affected properties will receive a separate notice to set up an appointment. All inspection staff will wear photo I.D. and carry photo equipment for this work.</p>
	<p>Site Safety: Workers on site are responsible for the work assigned to them. If you have construction questions or an issue on site – ask to be directed to the Site Inspector. If the Site Inspector is unavailable, contact the person listed at the end of this notice.</p>

	<p>Important information for owners of sprinkler systems / heated driveways and private landscaping features. Property owners should remove items located within City property limits (boulevard) to avoid damage.</p> <p>This includes items such as landscaping (plants and pavers), decorative objects, sprinkler systems or heated driveways. If you have a sprinkler system or heated driveway, please contact the Field Ambassador listed below.</p>
	<p>Telephone and Internet Services: This work may affect phone and internet cables for individual properties that aren't buried deep below the sidewalk. The contractor will coordinate with utility companies to minimize disruption. Residents who find their service has been disrupted should contact the Field Ambassador <u>and</u> notify their phone or internet service provider.</p>
	<p>Water Service Disruptions: From time-to-time, the water supply to your property will be shut-off to complete construction; the contractor will provide notice at least 24-hours in advance. Throughout the work, it is recommended that you temporarily disconnect any water treatment systems (i.e. softeners or filters), water-cooled air conditioners or similar plumbing fixtures. Automatic lawn sprinkler systems may also be affected, therefore, you may need to water manually. In the event you did not receive advance notice, the City may have needed to use an emergency water shut off to complete work.</p>
	<p>Substandard Water Service Replacement: Please take the time to read the attached fact sheet carefully as it contains important information on lead in drinking water and how to prepare for replacement. If you want to replace the private portion-of the water service pipe, the City of Toronto recommends that you obtain several quotes before selecting a contractor. PLEASE NOTE: The City is not able to get involved in any contract to have work done on private property. Property owners are responsible for ensuring contractors do not interfere with the work being done on City property. Learn more at www.toronto.ca/leadpipes.</p>
	<p>Road and Sidewalk Access: In order to complete the work in a safe manner, there will be road and sidewalk restrictions within the work zone. Access for emergency vehicles will be maintained at all times.</p> <p>Driveway Access: The contractor will notify you of any temporary restrictions to your driveway access. If your property has two entrances, one entrance will be kept open at all times.</p>
	<p>Traffic Management: Road users should expect delays and increased traffic on nearby streets. When driving, please be mindful of vulnerable road users such as pedestrians and cyclists. Motorists are reminded to share the lane with cyclists, who have the right to utilize the full lane when riding with mixed traffic. When passing a cyclist, the Highway Traffic Act requires motorists maintain a minimum distance of one metre between their vehicle and the cyclist.</p> <p>Northbound traffic on University Avenue will be reduced to one lane and detoured to the west side of the median. The northbound traffic will occupy an existing southbound traffic lane, which results in the southbound traffic also being reduced to one lane.</p> <p>To accommodate northbound cyclists, the existing southbound cycle track on the west side will be modified to allow bi-directional travel.</p> <p>Cyclists are encouraged to use the alternate northbound cycling routes via Beverly Street and Bay Street. See detour map at the bottom of this notice.</p>
	<p>Accessible Accommodation: The City's contractor must ensure safe and accessible walkways and entryways are maintained for everyone during construction. Any temporary access disruptions will be communicated as soon as possible. If you experience a disruption, have a specific access need or related accommodation request, contact the Field Ambassador listed below.</p>


	Water Flushing: You will see water flushing or running in several areas along this project due to cleaning the new watermain. Before substandard water services are replaced and the new watermain is put into service, the new pipe must meet Toronto Water's servicing and quality standards. Please DO NOT DRINK OR USE THE FLUSHING WATER, it is not potable.
	Restoration: The construction work area will be restored with sod, concrete and/or asphalt where required. Interlocking bricks, flagstone on a granular base, or other similar features that are removed from public and private property during construction will be replaced. Lawn seeding and/or laying of sod will be done as needed during ideal growing seasons only - April to June and September to October.

NEED MORE INFORMATION?

If you have questions about this construction project, please contact staff listed below, if you need to speak with staff on the construction site – please ask for the site inspector.

Contract	24ECS-LU-06SU
Field Ambassador	Maegan Segne at 905-302-4923 or field.ambassador2@ghd.com
Deaf, Hard of hearing and Hearing impaired service	Telecommunications Relay Service (TRS) Dial 711 (24/7)
General inquiries	311
Website	toronto.ca/UniversityRosedale toronto.ca/SpadinaFortYork

MAP OF CYCLE DETOUR

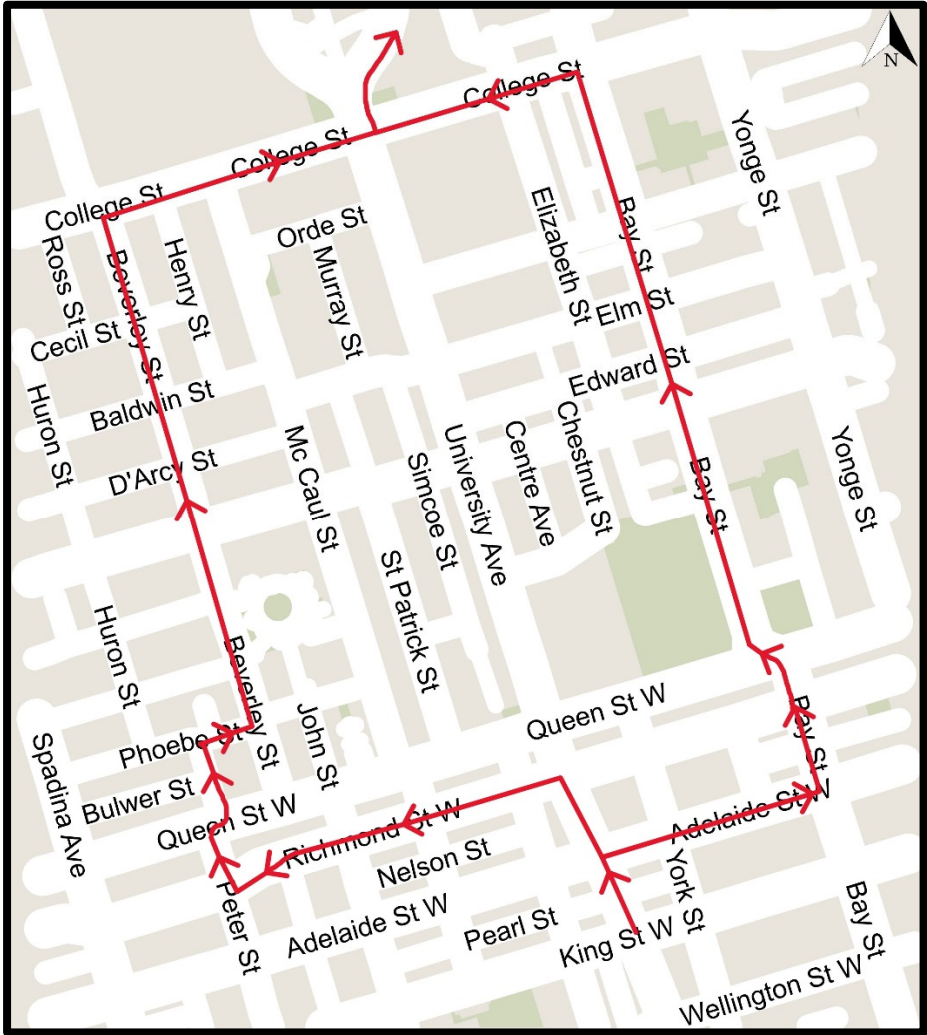

Thank you for your patience. Building a great city takes time. Better infrastructure for all of us is worth the wait.