


PLAN

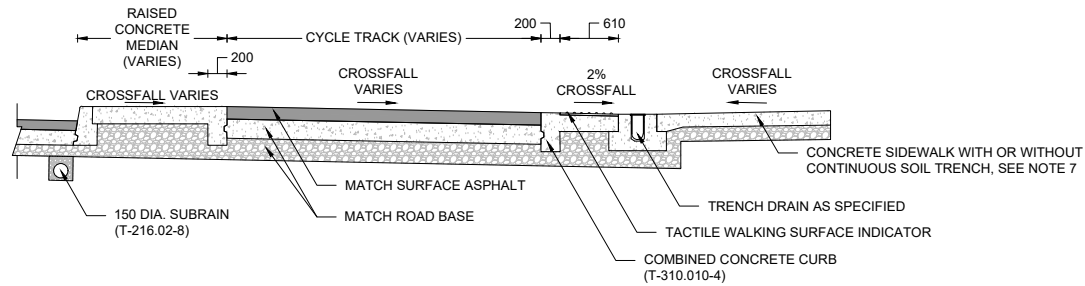

TYPICAL CROSS SECTION

- NOTES:**
- ALL DIMENSIONS IN MILLIMETRES, UNLESS OTHERWISE SPECIFIED.
 - TRENCH DRAIN AND TACTILE WALKING SURFACE INDICATOR LOCATION CAN BE INTERCHANGED, IF REQUIRED.
 - ALL TWSIs TO BE INSTALLED ONTO CONCRETE BASE.
 - WIDTH OF CONCRETE MEDIAN SHALL MATCH WIDTH OF CURB CUT.
 - CURB MEDIAN TO BE INSTALLED ONLY IF THERE IS A CURB CUT OR A STREETCAR IN THE MIDDLE LANE.
 - WHERE APPROACHING CYCLE TRACK IS AT SAME GRADE AS BUS PLATFORM "DO NOT PASS OPEN DOORS" TEXT IS TO BE PAINTED INSTEAD OF WHITE SOLID TRIANGLE.
 - FOR CONTINUOUS SOIL TRENCH OPTIONS REFER TO T-850 SERIES DRAWINGS INCLUDED IN GREEN INFRASTRUCTURE STANDARDS.

ENGINEERING & CONSTRUCTION SERVICES STANDARD DRAWING

REV 0 SEP 2023

RAISED BI-DIRECTIONAL CYCLE TRACK PLATFORM WITH CURB CUT AND TRENCH DRAIN

T-603.054

NTS SHEET 1

